

Supplementary Materials: On the Role of the Cathode for the Electro-Oxidation of Perfluorooctanoic Acid

Alicia L. Garcia-Costa ^{1,2,*}, Andre Savall ², Juan A. Zazo ¹, Jose A. Casas ¹ and Karine Groenen Serrano ^{2,*}

¹ Chemical Engineering Department, Universidad Autónoma de Madrid, 28049 Madrid, Spain; juan.zazo@uam.es (J.A.Z.); jose.casas@uam.es (J.A.C.)

² Laboratoire de Génie Chimique, Université de Toulouse, CNRS, INPT, UPS, 31062 Toulouse CEDEX 9, France; savall@chimie.ups-tlse.fr

* Correspondence: alicial.garcia@uam.es (A.L.G.C.); serrano@chimie.ups-tlse.fr (K.G.S.)

Received: 22 July 2020; Accepted: 6 August 2020; Published: date

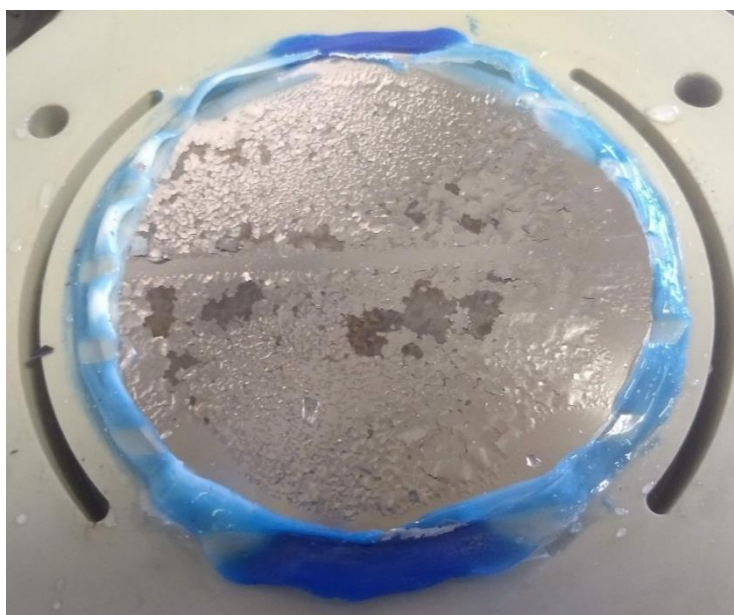


Figure S1. Damaged Pt cathode after high temperature PFOA electrooxidation (T: 80 °C).