

Article

A Nonparametric HEWMA- p Control Chart for Variance in Monitoring Processes

Muhammad Aslam ^{1,*}, G. Srinivasa Rao ², Ali Hussein AL-Marshadi ¹ and Chi-Hyuck Jun ³

¹ Department of Statistics, Faculty of Science, King Abdulaziz University, Jeddah 21551, Saudi Arabia; aalmarshadi@kau.edu.sa

² Department of Statistics, School of Mathematical Sciences, CNMS, The University of Dodoma, Dodoma P.O. Box 259, Tanzania; gaddesrao@gmail.com

³ Department of Industrial and Management Engineering, POSTECH, Pohang 790-784, Korea; chjun@postech.ac.kr

* Correspondence: aslam_ravian@hotmail.com or magmuhammad@kau.edu.sa

Received: 12 February 2019; Accepted: 6 March 2019; Published: 9 March 2019



Abstract: Control charts are considered as powerful tools in detecting any shift in a process. Usually, the Shewhart control chart is used when data follows the symmetrical property of a normal distribution. In practice, the data from the industry may follow a non-symmetrical distribution or an unknown distribution. The average run length (ARL) is a significant measure to assess the performance of the control chart. The ARL may mislead when the statistic is computed from an asymmetric distribution. To handle this issue, in this paper, an ARL-unbiased hybrid exponentially weighted moving average proportion (HEWMA- p) chart is proposed for monitoring the process variance for a non-normal distribution or an unknown distribution. The efficiency of the proposed chart is compared with the existing chart in terms of ARLs. The proposed chart is more efficient than the existing chart in terms of ARLs. A real example is given for the illustration of the proposed chart in the industry.

Keywords: Binomial distribution; hybrid exponentially weighted moving average statistic; unknown distribution; variance; average run length

1. Introduction

The aim of quality refers to the quality of those product characteristics that will appeal to potential customers. It takes into account what it would cost to produce the product and what the customers are willing to pay for the product. It can be thought of as the perspective for accomplishing manufactured quality. Once the manufacturing process has started, the process does not always produce a unit in conformity with what was proposed. This may be due to causes of defects arising in materials, parts, subassemblies, assemblies, and in the final product. Due to defective or nonconforming resources, parts, assemblies, and finished products that are discarded or reworked during the manufacturing process result in increased cost and customer dissatisfaction. The waste of time and effort in manufacturing the defective or nonconforming product, the delays in delivery, and other associated costs attributable to a poorly manufactured product are the consequence of manufactured quality. If a company wishes to produce higher quality products, it usually needs higher costs for manufactured products. However, the aim should always be to offer customers good quality at a low cost. Therefore, quality is also part of the corporate approach. Understanding quality concepts leads to correct implementation and management of product quality, which adds benefits to the entire production endeavor. If an industry understands and applies quality control principles in their manufactured products, it will produce well finished products, and reduction of the costs of the products may be possible.

The control charts are effectively used for the monitoring of the process. The Shewhart control chart is designed under the assumption that the data coming from the industry follows a normal distribution. This chart is more effective in detecting a relatively large shift in a process. The Shewhart control chart cannot be applied for a monitoring process when the industrial data follow the non-normal distribution or unknown distribution. Several authors focused on designing control charts for monitoring process mean, including for example [1–3]. Some authors designed control charts for monitoring the process variance; see for example [4,5]. More details on control charts can be seen in [6–13].

As mentioned by [14] practitioners are often not statisticians and may have problems in implementing control charts based on non-parametric approaches. Keeping in mind this issue, several authors, including for example, references [15–41] focused on designing control charts for monitoring the process mean that were easier to apply as compared to existing charts. Later on, Yang et al. [42] worked on the extension of the chart designed in [43] to monitor the process variance using a simple arcsin transformed symmetric exponentially weighted moving average (EWMA) statistic. Yang et al. [42] further extended the work of [5] by mixing the arcsin transformed EWMA and simple EWMA statistic. Yang et al. [5] designed the arcsin transformed EWMA to monitor process variance. The average run length (ARL) is used to assess the performance of a control chart. Smaller ARL means more efficient and faster detection of a shift in the process. According to [5] “For a monitoring statistic with an asymmetrical distribution, the control chart leads to a biased ARL. That is, the in-control ARL may be smaller than any out-of-control ARL, thus taking longer to detect shifts in the parameter than to trigger a false alarm”. Lowry et al. [44] proposed a chart to tackle this issue.

Haq [45] proposed a control chart using two EWMA statistics and called it a hybrid EWMA (HEWMA) chart. He claimed that their proposed chart performed better than the usual EWMA chart. The HEWMA statistic consists of two EWMA statistics and two smoothing constants. The control chart based on HEWMA statistic has the ability to detect the shift in the process earlier than the EWMA-based control chart. The operational process of the HEWMA based control chart is the same as the EWMA control chart. Several authors worked on these statistics in the literature. There are various variable charts for joint monitoring; see for example, Nyau et al. [11], who designed the multivariate EWMA chart for the median run-length. Riaz et al. [12] proposed a mixed Tukey EWMA–CUSUM (cumulative sum) control chart and Osei-Aning et al. [13] worked on the mixed EWMA–CUSUM and mixed CUSUM–EWMA. Haq [46] presented a discussion on the HEWMA control chart. Noor-ul-Amin et al. [47] worked on the HEWMA chart for the regression estimator. Several authors proposed the attribute control chart using EWMA and HEWMA statistics. Aslam et al. [48] designed the mixed EWMA control chart. Haq [49] worked on the nonparametric EWMA chart. Riaz et al. [50] designed the nonparametric double EWMA control chart. Aslam et al. [51] worked on the HEWMA–CUSUM chart for the Weibull distribution. Aslam et al. [52] worked on the HEWMA chart for the COM–Poisson distribution.

Yang et al. [14] designed an ARL unbiased EWMA- p chart. According to the best of our knowledge, there is no work on designing a EWMA- p chart using a hybrid EWMA. The proposed methodology presents an approach to evaluate the performance using the combination of a hybrid EWMA control chart with weighted moving average proportion (EWMA- p) control chart. The hybrid EWMA and EWMA- p charts are chosen since it has been shown that these charts are efficient in detecting small but possibly detrimental shifts in the process. Aslam et al. [52] also pointed out that in a general manufacturing process, an exponentially weighted moving average EWMA control chart is more efficient in detecting small process shifts. The control chart based on the EWMA method consists of an exponential weight factor applied to the data, which gives current or recent past observations more weight than older data values. The combination of a hybrid EWMA chart and EWMA- p charts will be explored to determine the best conditions, i.e., the appropriate values of control variables for monitoring concrete strength. In this paper, we will present the enhanced hybrid exponential weighted

moving average proportion (enhanced HEWMA- p) chart. The structure of the proposed chart will be presented and its efficacy will be compared with [14].

2. Design of the Enhanced HEWMA- p Chart

In this section, we will present some equations taken from [14] and present the operational procedure of the proposed control chart.

Let a random sample of size n be drawn from process X whose distribution is unknown with a variance σ^2 to practitioners. Yang et al. [14] suggested to select an even sample size n for convenience. Assuming that these samples are independently distributed with known variance, let

$$Y_{i/2}^* = (X_i - X_{i-1})^2/2, \quad i = 2, 4, \dots, n. \quad (1)$$

Then,

$$E(Y_j^*) = \sigma^2, \quad j = 1, 2, \dots, 0.5n. \quad (2)$$

Define

$$V = \sum_{j=1}^{0.5n} I_j, \quad (3)$$

where

$$I_j = \begin{cases} 1, & \text{if } Y_j^* > \sigma^2 \\ 0, & \text{otherwise} \end{cases} \quad \text{for } j = 1, 2, \dots, 0.5n.$$

Therefore, when the process is in control, V is distributed as a binomial with parameters $0.5n$ and p_{v0} , where the value of p_{v0} depends on the distribution of X_i . Let us define $p_{v0} = P(Y_j^* > \sigma^2)$. The null hypothesis is that the process is in control state at p_{v0} . The alternative hypothesis is that the process has been shifted at p_{v1} . According to [14], the statistic of $V_t/0.5n$ has the mean of p_{v0} and the variance of $p_{v0}(1 - p_{v0})/0.5n$.

We define the following two EWMA statistics:

$$EWMA_{p_t} = \lambda_2 V_t/0.5n + (1 - \lambda_2)EWMA_{p_{t-1}} \quad (4)$$

$$HEWMA_{p_t} = \lambda_1 EWMA_{p_t} + (1 - \lambda_1)HEWMA_{p_{t-1}} \quad (5)$$

where $\lambda_1 \in [0, 1]$ and $\lambda_2 \in [0, 1]$ are smoothing constants, and $HEWMA_{p_t}$ is the statistic of enhanced HEWMA- p at t .

The proposed control chart is stated as follows:

Step 1: Select a random sample of size $n(X_1, \dots, X_n)$ from the process at time t . Compute V_t using (3) and $HEWMA_{p_t}$ using (5).

Step 2: The process is declared to be as out-of-control if $HEWMA_{p_t} \geq UCL$ or $HEWMA_{p_t} \leq LCL$ and to be in-control if $LCL < HEWMA_{p_t} < UCL$, here LCL and UCL show the lower control limit and upper control limit.

The proposed control chart is the extension of the chart proposed by [14]. The proposed chart reduces to [14] chart when $\lambda_1 = \lambda_2 = \lambda$ or $\lambda_1 = 1$ or $\lambda_2 = 1$. The proposed chart becomes the Shewhart chart when $\lambda_1 = 1$ and $\lambda_2 = 1$. It is assumed that the starting value of $HEWMA_{p_t}$ is the mean of p_{v0} , i.e., $HEWMA_{p_t} = p_{v0}$ for an in control process. By following [45], the mean and variance of statistic $HEWMA_{p_t}$ is given by

$$E(HEWMA_{p_t}) = p_{v0} \quad (6)$$

and

$$V(HEWMA_{p_t}) = \frac{\lambda_1^2 \lambda_2 p_{v0} (1 - p_{v0})}{(2 - \lambda_2) 0.5n} \left[\frac{1 - (1 - \lambda_1)^{2t}}{\lambda_1 (2 - \lambda_1)} - \frac{(1 - \lambda_2)^2 \{ (1 - \lambda_2)^{2t} - (1 - \lambda_1)^{2t} \}}{(1 - \lambda_2)^2 - (1 - \lambda_1)^2} \right] \quad (7)$$

Thus, the asymptotic variance of $HEWMA_{p_t}$ is given as

$$V(HEWMA_{p_t}) = \frac{\lambda_1 \lambda_2 p_{v0} (1 - p_{v0})}{(2 - \lambda_2)(2 - \lambda_1) 0.5n} \quad (8)$$

As suggested by [14] “the new variance chart may be constructed based on the distribution of the monitoring statistic $V_t/0.5n$, which is an asymmetric distribution having similar defects to those of the corresponding Shewhart p chart”. Therefore, monitoring the process variance is the same as the monitoring process proportion p_{v0} , as the proportion p_{v0} of statistic $V_t/0.5n$ may not be same. The control limits of the proposed control chart are given as

$$UCL = p_{v0} + k_1 \sqrt{\frac{\lambda_1 \lambda_2 p_{v0} (1 - p_{v0})}{(2 - \lambda_2)(2 - \lambda_1) 0.5n}} \quad (9)$$

$$LCL = p_{v0} - k_2 \sqrt{\frac{\lambda_1 \lambda_2 p_{v0} (1 - p_{v0})}{(2 - \lambda_2)(2 - \lambda_1) 0.5n}} \quad (10)$$

$$CL = p_{v0}$$

where $k_1 > k_2$ are control limit coefficients.

3. The Average Run Length of Enhanced HEWMA- p Control Chart

The proposed enhanced hybrid exponential weighted moving average proportion (enhanced HEWMA- p) control chart performance measure can be used as the average run length (ARL). In this paper, we have limited our study to non-normal distributions with finite variance. The control limits of the enhanced HEWMA- p control chart are determined by setting the in-control ARL (ARL_{v0}) to be a specified value, usually 370. The ARL represents the expected number of samples until a control chart signals. The proposed control chart comprises of two control coefficients, k_1 and k_2 , which are obtained by considering the desired in-control ARL. Once the coefficients k_1 and k_2 are determined, the control limits of the enhanced HEWMA- p control chart are obtained and the out-of-control ARLs (ARL_{v1}) can be obtained according to various values of shift in proportion, $p_{v1} = c p_{v0}$, $c \neq 1$, and $0 < p_{v1} \leq 1$. We use the following Monte Carlo simulation procedure to compute control coefficients k_1 and k_2 , and to calculate the out-of-control ARL (ARL_{v1}) under a specified n , p_{v0} , λ_1 , λ_2 and ARL_{v0} values.

Step 1. Setting specified values of n , p_{v0} , λ_1 , λ_2 , and ARL_{v0} .

Step 2. Evaluation of proposed control chart coefficients k_1 and k_2 for in-control process

2.1. Generate 10,000 possible values of control chart coefficients k_1 and k_2 .

2.2. When the process is in-control, from a binomial distribution with the in-control parameters $0.5n$ and p_{v0} , a random sample of size 2000 is generated, i.e., $V_t \sim \text{binomial}(0.5n, p_{v0})$ at time t .

2.3. The enhanced HEWMA- p statistic HEWMA- p is computed for each subgroup of size 2000.

2.4. The proposed statistic HEWMA- p is plotted and in-control if $LCL \leq HEWMA_p \leq UCL$; go to step 2.5 and the run length for out of control process is noted.

2.5. Repeat 10,000 times steps 2.2 through 2.3, to compute run lengths. If the average of these run lengths (ARLs) is equal to the specified ARL_{v0} note the corresponding values of k_1 and k_2 , and move to step 3, otherwise select other possible values of k_1 and k_2 , and repeat the procedure from steps 2.2.

Step 3 Evaluation of ARL_{v1} for proposed control chart when the process is shifted

- 3.1. Let the out-of-control proportion, p_{v1} , be a proportion of the in-control proportion, p_{v0} . That is, $p_{v1} = c p_{v0}$, $c \neq 1$, and $0 < p_{v1} \leq 1$, where c is the amount of shift in the process proportion, p_{v0} .
- 3.2. From binomial distribution, with the in-control parameters, $0.5n$ and p_{v1} , a random sample of size 2000 is generated, i.e., $V_t \sim \text{binomial}(0.5n, p_{v1})$ at time t .
- 3.3. The Enhanced HEWMA- p Statistic HEWMA- p is Computed for Each Subgroup of Size 2000.
- 3.4. Using the Values of k_1 and k_2 , the proposed statistic HEWMA- p is plotted and in-control if $LCL < HEWMA_{p_t} < UCL$; go to step 3.5 and the run length for out of control process is noted.
- 3.5. Repeat 10,000 times steps 3.2 through 3.3, to compute run lengths. The average of run length (ARL_{v1}) and standard error of run length ($SERL_{v1}$) for each specified amount of shift is computed.

In Table 1, we present control chart coefficients k_1 and k_2 , and corresponding upper and lower control limits of the enhanced HEWMA- p control chart for $n = 8$ (1) 30, $p_{v0} = 0.1$, $\lambda_1 = 0.2$, and $\lambda_2 = 0.2$ with $ARL_{v0} \approx 370$. Table 2 presents ARL_{v1} and $SERL_{v1}$ values (in second row corresponding to each n value) for $p_{v1} = 0.025$ (0.025) 0.200 at $n = 8$ (1) 30, $p_{v0} = 0.1$, $\lambda_1 = 0.2$, and $\lambda_2 = 0.2$ with $ARL_{v0} \approx 370$. In Table 3, we present control chart coefficients k_1 and k_2 , and corresponding upper and lower control limits of the enhanced HEWMA- p control chart for $n = 8$ (1) 30, $p_{v0} = 0.3$, $\lambda_1 = 0.2$, and $\lambda_2 = 0.2$ with $ARL_{v0} \approx 370$. Table 4 presents ARL_{v1} and $SERL_{v1}$ values (in second row corresponding to each n value) for $p_{v1} = 0.200$ (0.025) 0.400 at $n = 8$ (1) 30, $p_{v0} = 0.3$, $\lambda_1 = 0.2$, and $\lambda_2 = 0.2$ with $ARL_{v0} \approx 370$.

From Tables 2 and 4 we observe the following trend in ARL_{v1}

1. If n is increased, there is a decrease in ARL_{v1} and $SERL_{v1}$ values, as we expected. For example, for $0.5n = 4$ and $p_{v1} = 0.05$ from Table 2 we have $ARL_{v1} = 107.03$ and $SERL_{v1} = 0.8830$, whereas if $0.5n = 15$, we have $ARL_{v1} = 18.12$ and $SERL_{v1} = 0.0921$. We also observed a similar trend from Table 4.
2. The ARL_{v1} and $SERL_{v1}$ values decrease when p_{v1} is far away from p_{v0} .
3. The ARL_{v1} and $SERL_{v1}$ values decrease more rapidly as c increases rather than it decreases. For example, for $0.5n = 4$ and $p_{v1} = 0.05$ ($c = 0.5$) from Table 2 we have $ARL_{v1} = 107.03$ and $SERL_{v1} = 0.8830$, whereas if $p_{v1} = 0.15$ ($c = 1.5$), we have $ARL_{v1} = 47.74$ and $SERL_{v1} = 0.4055$. We also observed a similar trend from Table 4.

The R codes for this study are given in the Appendix A.

Table 1. The control limits for enhanced HEWMA- p control chart with $ARL_0 = 370$ when $\lambda_1 = 0.2$, $\lambda_2 = 0.2$, and $p_{v0} = 0.1$. HEWMA- p is hybrid exponentially weighted moving average proportion, ARL is average run length, UCL is upper control limit, LCL is lower control limit.

n	$0.5n$	UCL	LCL	k_1	k_2
8	4	0.1892	0.0126	5.3509	5.2421
10	5	0.1823	0.0252	5.5211	5.0203
12	6	0.1751	0.0314	5.5216	5.0416
14	7	0.1699	0.0364	5.5459	5.0498
16	8	0.1689	0.0430	5.8435	4.8326
18	9	0.1612	0.0431	5.5045	5.1243
20	10	0.1573	0.0448	5.4378	5.2352
22	11	0.1618	0.0525	6.1448	4.7231
24	12	0.1553	0.0524	5.7484	4.9475
26	13	0.1566	0.0561	6.1275	4.7436
28	14	0.1492	0.0541	5.5185	5.1495
30	15	0.1477	0.0558	5.5422	5.1406

Table 2. The ARLs of the enhanced HEWMA-*p* control chart for $\lambda_1 = 0.2$, $\lambda_2 = 0.2$, and $p_{v0} = 0.1$.

<i>n</i>	$0.5n$	$p_{v1} = 0.025$	$p_{v1} = 0.050$	$p_{v1} = 0.075$	$p_{v0} = 0.100$	$p_{v1} = 0.125$	$p_{v1} = 0.150$	$p_{v1} = 0.175$	$p_{v1} = 0.200$
8	4	35.29	107.03	227.89	370.30	108.55	47.74	27.62	18.52
		0.2125	0.8830	4.1031	3.7450	1.0118	0.4055	0.2032	0.1169
10	5	22.51	55.24	204.00	370.36	107.43	45.55	25.30	16.80
		0.1067	0.4342	1.9517	3.7060	0.9798	0.3844	0.1749	0.0992
12	6	19.22	44.42	168.19	370.36	101.22	40.28	22.00	14.99
		0.0794	0.3273	1.5208	3.5468	0.9420	0.3305	0.1508	0.0837
14	7	16.81	37.03	141.92	370.09	98.87	36.21	19.87	13.64
		0.0630	0.2572	1.3294	3.7582	0.9133	0.2828	0.1276	0.0716
16	8	14.15	28.21	100.20	370.12	106.17	37.22	18.71	12.36
		0.0473	0.1753	0.8503	3.5983	0.9782	0.2861	0.1260	0.0680
18	9	14.17	29.27	116.90	370.35	82.10	29.98	16.52	11.66
		0.0443	0.1870	1.0169	3.6899	0.7268	0.2192	0.0986	0.0549
20	10	13.41	27.90	114.63	370.35	74.67	26.99	15.20	9.83
		0.0411	0.1772	1.0130	3.7271	0.6372	0.1921	0.0860	0.0478
22	11	11.07	20.20	65.97	370.20	101.72	31.72	15.01	9.60
		0.0285	0.1097	0.5498	3.5711	0.9293	0.2351	0.0942	0.0491
24	12	10.12	19.51	71.04	370.29	78.48	24.22	12.61	8.29
		0.0270	0.1122	0.5978	3.6796	0.7026	0.1885	0.0756	0.0420
26	13	9.21	17.79	57.10	370.28	90.92	24.92	11.07	7.55
		0.0219	0.0912	0.4547	3.6574	0.7930	0.1952	0.0787	0.0420
28	14	9.69	19.33	70.98	370.34	62.21	21.78	11.49	7.28
		0.0231	0.1001	0.5895	3.8081	0.5213	0.1400	0.0600	0.0339
30	15	9.28	18.12	65.59	370.11	60.42	20.57	11.07	7.07
		0.0213	0.0921	0.5349	3.8897	0.5151	0.1291	0.0566	0.0326

First row ARL and second row SERL (standard error of run length).

Table 3. The control constants with $ARL_0 = 370$ for enhanced HEWMA-*p* control chart. when $\lambda_1 = 0.2$, $\lambda_2 = 0.2$, and $p_{v0} = 0.3$.

<i>n</i>	$0.5n$	UCL	LCL	k_1	k_2
8	4	0.4404	0.1691	5.5158	5.1435
10	5	0.4342	0.1873	5.8915	4.9485
12	6	0.4137	0.1911	5.4695	5.2405
14	7	0.4049	0.1990	5.4499	5.2481
16	8	0.4040	0.2094	5.7765	5.0350
18	9	0.3931	0.2111	5.4839	5.2395
20	10	0.3924	0.2186	5.7395	5.0565
22	11	0.3883	0.2225	5.7495	5.0485
24	12	0.3803	0.2230	5.4635	5.2414
26	13	0.3815	0.2287	5.7725	5.0515
28	14	0.3925	0.2352	6.7985	4.7655
30	15	0.3887	0.2376	6.7485	4.7465

Table 4. The ARL_{v1} of the enhanced HEWMA- p control chart for $\lambda_1 = 0.2$, $\lambda_2 = 0.2$, and $p_{v0} = 0.3$.

n	$0.5n$	$p_{v1} = 0.20$	$p_{v1} = 0.225$	$p_{v1} = 0.250$	$p_{v1} = 0.275$	$p_{v0} = 0.300$	$p_{v1} = 0.325$	$p_{v1} = 0.350$	$p_{v1} = 0.375$	$p_{v1} = 0.400$
8	4	35.28	60.05	118.01	245.61	370.90	226.17	107.71	61.38	38.35
		0.2524	0.4932	1.0515	2.3753	3.8363	2.2024	0.9818	0.5119	0.3029
10	5	26.68	43.27	84.94	188.98	370.31	280.15	124.92	63.86	38.04
		0.1754	0.3237	0.7445	1.7778	3.5587	2.7424	1.1877	0.5410	0.2896
12	6	25.94	43.63	88.21	218.61	370.36	193.66	82.10	44.11	27.30
		0.1651	0.3323	0.7546	2.1131	3.7020	1.8944	0.7278	0.3442	0.1879
14	7	22.86	38.41	77.95	203.34	370.12	180.32	72.49	38.13	23.90
		0.1408	0.2824	0.6669	1.9692	3.6434	1.7636	0.6397	0.2950	0.1580
16	8	19.08	30.41	59.02	155.32	370.12	213.84	80.71	40.05	23.99
		0.1092	0.2102	0.4795	1.4364	3.6315	2.0796	0.7144	0.3078	0.1549
18	9	18.64	29.35	61.47	169.83	370.12	161.54	62.54	31.54	19.87
		0.0991	0.1991	0.5082	1.6226	3.5624	1.5162	0.5296	0.2273	0.1222
20	10	16.21	25.20	49.94	139.81	370.11	185.81	65.54	29.22	19.90
		0.0827	0.1632	0.3935	1.3342	3.6760	1.8122	0.5570	0.2378	0.1183
22	11	15.02	23.56	45.65	128.87	370.29	176.40	61.05	27.67	16.29
		0.0716	0.1513	0.3694	1.1736	3.5888	1.6707	0.5079	0.2084	0.1034
24	12	14.60	23.50	46.43	141.41	370.11	132.92	49.45	22.94	16.06
		0.0683	0.1484	0.3717	1.2653	3.5991	1.3040	0.4106	0.1661	0.0836
26	13	13.54	20.49	39.45	115.26	370.11	161.59	52.72	26.01	15.38
		0.0593	0.1236	0.3016	1.0572	3.6564	1.5568	0.4251	0.1730	0.0858
28	14	12.08	17.50	32.06	88.77	370.20	356.82	88.25	29.94	13.28
		0.0489	0.0966	0.2331	0.7514	3.6537	3.4724	0.7457	0.2628	0.1168
30	15	11.49	16.59	30.72	83.96	370.08	326.41	79.90	27.51	13.22
		0.0457	0.0902	0.2163	0.7208	3.6923	3.1849	0.6792	0.2246	0.1001

First row ARL and second row SERL (standard error of run length).

4. Comparative Study

Now, we discuss the performance of the proposed control chart with the existing control charts proposed by [4,14] for $\lambda = 0.2$. The proposed chart reduces to [14] chart when $\lambda_1 = \lambda_2 = \lambda = 0.2$ (for example). We present the values of ARL_{v1} for the proposed control chart as well as control charts given by [4,14] in Table 5 when in-control $ARL_{v0} \approx 370$.

From Table 5, we observe that the proposed control chart has smaller values of ARL_{v1} as compared to the existing two control charts. For example, when $0.5n = 6$, $\lambda_1 = \lambda_2 = \lambda = 0.2$, $p_{v0} = 0.3$, $p_{v1} = 0.4$ the proposed control chart gives ARL_{v1} is 27.30, the ARL_{v1} from the two existing control charts are 31.36 and 34.20, respectively. Thus, the proposed control chart performs better than the existing control charts.

Table 5 ARL_{v1} s comparison between the chart proposed by [4,14] for $\lambda = 0.2$ and enhanced HEWMA- p control chart for $\lambda_1 = 0.2$, $\lambda_2 = 0.2$. Figure 1 depicts the ARL_{v1} profile comparison at $p_{v0} = 0.1$ and $p_{v1} = 0.2$ for different values of n under HEWMA- p chart and two existing charts. From Figure 1, we noticed that ARL_{v1} values of enhanced HEWMA- p control chart are smaller than in the two existing control charts. Hence, our proposed enhanced HEWMA- p control chart performed well as compared with existing charts.

Table 5. The comparison of the proposed chart with existing charts.

n	$0.5n$	$p_{v0} = 0.1$			$p_{v0} = 0.3$					
		Yang and Arnold [4]	Yang and Arnold [14]	Enhanced	Yang and Arnold [4]	Yang and Arnold [14]	Enhanced	Yang and Arnold [4]	Yang and Arnold [14]	Enhanced
		$p_{v1} = 0.2$	$p_{v1} = 0.2$	$p_{v1} = 0.2$	$p_{v1} = 0.2$	$p_{v1} = 0.2$	$p_{v1} = 0.2$	$p_{v1} = 0.4$	$p_{v1} = 0.4$	$p_{v1} = 0.4$
8	4	28.2	25.50	18.52	41.90	43.59	35.28	50.50	47.55	38.35
10	5	22.7	19.02	16.80	33.70	34.06	26.68	40.80	40.29	38.04
12	6	19	17.43	14.99	28.20	31.24	25.94	34.20	31.36	27.30
14	7	16.4	14.54	13.64	24.20	25.69	22.86	29.40	28.23	23.90
16	8	16.4	12.55	12.36	21.30	22.42	19.08	25.80	24.58	23.99
18	9	13	11.85	11.66	19.00	19.96	18.64	23.00	22.13	19.87
20	10	11.8	10.67	9.83	17.20	17.27	16.21	20.70	20.96	19.90
22	11	10.9	9.67	9.60	15.70	17.92	15.02	18.90	17.03	16.29
24	12	10.1	7.47	8.29	14.50	14.77	14.90	17.40	17.25	15.96
26	13	9.4	7.95	7.55	13.40	14.07	13.54	16.10	15.62	15.38
28	14	8.9	7.87	7.28	12.60	13.45	12.08	15.10	14.26	13.28
30	15	8.4	7.51	7.07	11.80	11.98	11.59	14.10	14.23	13.22

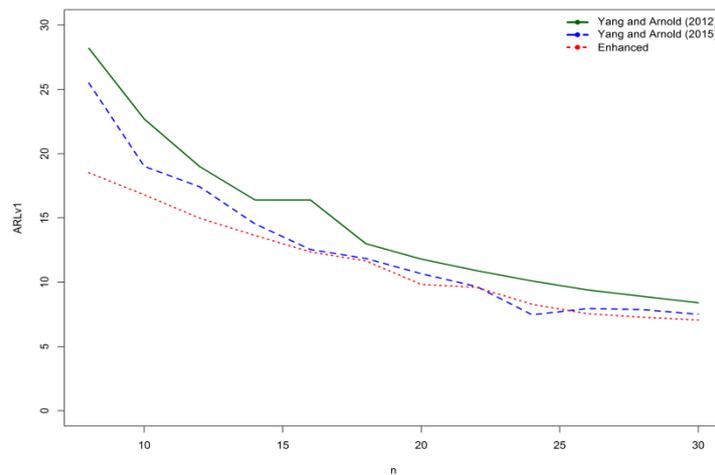


Figure 1. The ARL_{v1} profile comparison at $p_{v0} = 0.1$ and $p_{v1} = 0.2$ for different values of n under HEWMA- p chart and Yang and Arnold [4,14].

5. Example

In this section, we present an example given by [14]. The service time of a bank branch in Taiwan is used to illustrate the application of the proposed enhanced HEWMA- p control chart to monitor the variability of service time. According to [14] “From the historical data, the in-control data of service times (unit: minutes) is a non-normal/unknown distribution with variance 27.805. Reference [14] illustrated that the resulting in-control probability that the service time is larger than the in-control variance is $p_{v0} = P(Y_j^* > 27.805) = 0.31$ ”. To construct the enhanced HEWMA- p control chart, we also use the same value of p_{v0} . The upper and lower control limits of the enhanced HEWMA- p control chart with $\lambda_1 = 0.2, \lambda_2 = 0.2$ when in-control $ARL_{v0} \approx 370$ are $UCL = 0.4454$ and $LCL = 0.1963$.

Ten new samples of size 10 each from new automatic service system of the bank branch under study were considered [14] and listed in Table 6. To illustrate the out-of-control detection ability, for each sample in Table 6, the statistic, V_t and the monitoring statistic $HEWMA_{p_t} = \lambda_1 EWMA_{p_t} + (1 - \lambda_1) HEWMA_{p_{t-1}}$ where $EWMA_{p_t} = \lambda_2 V_t / 0.5n + (1 - \lambda_2) EWMA_{p_{t-1}}$ at time $t, t = 1, 2, \dots, 10$, were computed. The corresponding enhanced HEWMA- p control chart detected out-of-control variance signals from the third sample onward (samples 3–10 on the enhanced HEWMA- p control chart) (Figure 2). By comparing Figure 2 with the chart in [14], it can be seen that the existing chart indicated a shift at the 4th sample. Therefore, the proposed chart was more efficient in detecting a shift in the process as compared to existing chart of Yang and Arnold [14]. The same performance was also shown by the results in Tables 2 and 4. For this study, we can conclude that the proposed chart shows better performance than the existing two charts.

Table 6. The new service times from 10 counters in a bank branch. EWMA is exponentially weighted moving average.

t	X_1	X_2	X_3	X_4	X_5	X_6	X_7	X_8	X_9	X_{10}	V_t	$EWMA_{p_t}$	$HEWMA_{p_t}$
1	3.54	0.01	1.33	7.27	5.52	0.09	1.84	1.04	2.91	0.63	0	0.2480	0.2976
2	0.86	1.61	1.15	0.96	0.54	3.05	4.11	0.63	2.37	0.05	0	0.1984	0.2381
3	1.45	0.19	4.18	0.18	0.02	0.70	0.80	0.97	3.60	2.94	0	0.1587	0.1905
4	1.37	0.14	1.54	1.58	0.45	6.01	4.59	1.74	3.92	4.82	0	0.1270	0.1524
5	3.00	2.46	0.06	1.80	3.25	2.13	2.22	1.37	2.13	0.25	0	0.1016	0.1219
6	1.59	3.88	0.39	0.54	1.58	1.70	0.68	1.25	6.83	0.31	0	0.0813	0.0975
7	5.01	1.85	3.10	1.00	0.09	1.16	2.69	2.79	1.84	2.62	0	0.0650	0.0780
8	4.96	0.55	1.43	4.12	4.06	1.42	1.43	0.86	0.67	0.13	0	0.0520	0.0624
9	1.08	0.65	0.91	0.88	2.02	2.88	1.76	2.87	1.97	0.62	0	0.0416	0.0499
10	4.56	0.44	5.61	2.79	1.73	2.46	0.53	1.73	7.02	2.13	0	0.0333	0.0399

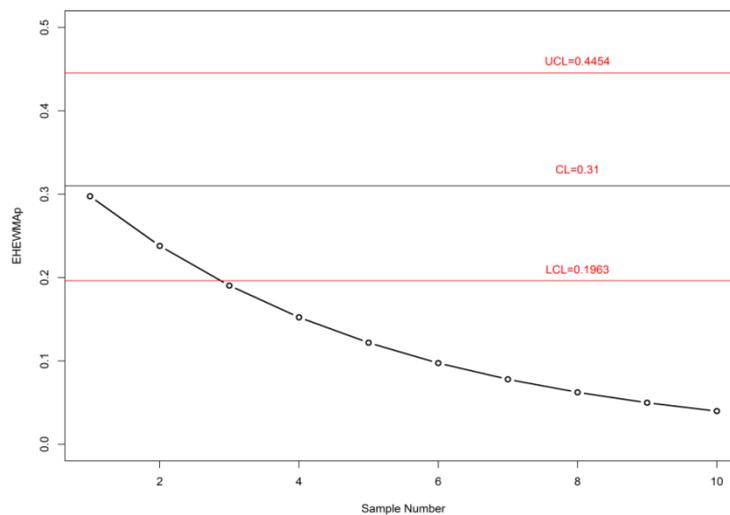


Figure 2. The enhanced HEWMA- p chart for the example.

6. Concluding Remarks

In this paper, an enhanced hybrid EWMA- p chart is proposed for monitoring the process variance. A simulation procedure is presented for calculating its average run lengths (ARLs). Some tables are presented for practical use. The simulation study supports that the proposed chart is more efficient in detecting a shift in the process. A real example is presented for illustration purposes. The proposed control chart can be used in the industry for the monitoring of processes when the distribution is unknown in practice. The limitation of the proposed chart is that it can be used for only a fixed sample size. The variable sample size enhanced hybrid EWMA- p chart will be considered as our future research. In addition, the proposed control chart for a variable sample size can be considered as future research. The proposed chart using autocorrelation can be considered as future research.

Author Contributions: Conceived and designed the experiments, M.A., G.S.R., A.H.A.-M., C.-H.J. Performed the experiments, M.A. and A.H.A.-M. Analyzed the data, M.A. and A.H.A.-M. Contributed reagents/materials/analysis tools, M.A. Wrote the paper, M.A.

Funding: This article was funded by the Deanship of Scientific Research (DSR) at King Abdulaziz University, Jeddah. The authors, therefore, acknowledge and thank DSR for technical and financial support.

Acknowledgments: The authors are deeply thankful to the editor and reviewers for their valuable suggestions to improve the quality of this manuscript.

Conflicts of Interest: The authors declare no conflict of interest regarding this paper.

Nomenclature

ARL	Average run length
HEWMA- p	Hybrid exponentially weighted moving average proportion
EWMA	Exponentially weighted moving average
HEWMA	Hybrid exponentially weighted moving average
EWMA-CUSUM	Exponentially weighted moving average-Cumulative sum
LCL	Lower control limit
UCL	Upper control limit
SERL	Standard error of run length

Appendix A

1. R code to obtain chart coefficients
2. `ARL.EHEWMAp<-function(r0,n,la1,la2,p0) {`
3. `# r0 is specified in-control ARL (ARL_{v0})`
4. `# la1 is lamda1`
5. `# la2 is lamda2`

```

6. # p0 is specified in control p value
7. options(digits =6)
8. N<-10,000
9. rl<-c()
10. vt<-c()
11. G<-c()
12. H<-c()
13. set.seed(5577)
14. m<-n/2
15. v<-la1*la2*p0*(1-p0)/((2-la1)*(2-la2)*m)
16. q<-seq(2.65,7.09, by =0.1)
17. for (k1 in q){
18.   for (k2 in q)
19.     {
20.       if(k1>k2) {
21.         l<-p0-k2*sqrt(v)
22.         cl<-p0
23.         u<-p0+k1*sqrt(v)
24.         a. for(j in 1:2000)
25.           b. {
26.             i. G[1]<-p0
27.             ii. H[1]<-p0
28.             iii. for(i in 2:N)
29.               iv. {
30.                 v. vt[i]<-rbinom(1, m, p0)
31.                 vi. G[i]<-la2*vt[i]/m+(1-la2)*G[i-1]
32.                 vii. H[i]<-la1*G[i]+(1-la1)*H[i-1]
33.                 viii. if ((H[i]<l) | (H[i]>u)){rl[j]=i;break;}else{rl[j]=0;}
34.                 ix. }
35.                 c. }
36.                 d. arl<-mean(rl)
37.                 e. if ((arl>=r0) && (arl<=r0+5)) {
38.                   i. print(c(n,la1,la2,p0,k1,k2,arl))
39.                   f. sdarl<-sd(rl)
40.                   g. searl<-sdarl/sqrt(N)
41.                 }
42.                 24. }
43.                 25. }
44.                 26. }
45.                 27. }

```

References

- Chakraborti, S.; Van der Laan, P.; Bakir, S. Nonparametric control charts: An overview and some results. *J. Qual. Technol.* **2001**, *33*, 304. [[CrossRef](#)]
- Chakraborti, S.; Eryilmaz, S. A nonparametric Shewhart-type signed-rank control chart based on runs. *Commun. Stat. Simul. Comput.* **2007**, *36*, 335–356. [[CrossRef](#)]
- Li, S.-Y.; Tang, L.-C.; Ng, S.-H. Nonparametric CUSUM and EWMA control charts for detecting mean shifts. *J. Qual. Technol.* **2010**, *42*, 209. [[CrossRef](#)]
- Yang, S.F.; C. Arnold, B. Signal detection for process with unknown distribution. In *Advanced Materials Research*; Trans Tech Publications: Zurich, Switzerland, 2012; pp. 1472–1475.
- Yang, S.-F.; Arnold, B.C. A simple approach for monitoring business service time variation. *Sci. World J.* **2014**, *2014*. [[CrossRef](#)] [[PubMed](#)]
- Avinadav, T.; Perlman, Y.; Cheng, T. Economic design of control charts for monitoring batch manufacturing processes. *Int. J. Comput. Integr. Manuf.* **2016**, *29*, 212–221. [[CrossRef](#)]
- Chen, F.-L.; Huang, H.-J. A synthetic control chart for monitoring process dispersion with sample range. *Int. J. Adv. Manuf. Technol.* **2005**, *26*, 842–851. [[CrossRef](#)]
- Aslam, M.; Khan, N.; Azam, M.; Jun, C.-H. Designing of a new monitoring t-chart using repetitive sampling. *Inf. Sci.* **2014**, *269*, 210–216. [[CrossRef](#)]
- Aslam, M.; Azam, M.; Jun, C.H. A control chart for COM–poisson distribution using resampling and exponentially weighted moving average. *Qual. Reliab. Eng. Int.* **2016**, *32*, 727–735. [[CrossRef](#)]

10. Aslam, M.; Azam, M.; Jun, C.-H. A new exponentially weighted moving average sign chart using repetitive sampling. *J. Process. Control.* **2014**, *24*, 1149–1153. [[CrossRef](#)]
11. Nyau, S.Y.; Lee, M.H.; Wong, M.D. Optimal statistical design of variable sample size multivariate exponentially weighted moving average control chart based on median run-length. *Qual. Technol. Quant. Manag.* **2017**, *14*, 478–495. [[CrossRef](#)]
12. Riaz, M.; Khaliq, Q.-U.-A.; Gul, S. Mixed Tukey EWMA-CUSUM control chart and its applications. *Qual. Technol. Quant. Manag.* **2017**, *14*, 378–411. [[CrossRef](#)]
13. Osei-Aning, R.; Abbasi, S.A.; Riaz, M. Mixed EWMA-CUSUM and mixed CUSUM-EWMA modified control charts for monitoring first order autoregressive processes. *Qual. Technol. Quant. Manag.* **2017**, *14*, 429–453. [[CrossRef](#)]
14. Yang, S.F.; Arnold, B.C. Monitoring process variance using an ARL-unbiased EWMA- p control chart. *Qual. Reliab. Eng. Int.* **2015**. [[CrossRef](#)]
15. Bakir, S.T.; Reynolds, M.R. A nonparametric procedure for process control based on within-group ranking. *Technometrics* **1979**, *21*, 175–183. [[CrossRef](#)]
16. Amin, R.W.; Searcy, A.J. A nonparametric exponentially weighted moving average control scheme. *Commun. Stat. Simul. Comput.* **1991**, *20*, 1049–1072. [[CrossRef](#)]
17. Amin, R.W.; Reynolds, M.R., Jr.; Saad, B. Nonparametric quality control charts based on the sign statistic. *Commun. Stat. Theory Methods* **1995**, *24*, 1597–1623. [[CrossRef](#)]
18. Qiu, P.; Hawkins, D. A rank-based multivariate CUSUM procedure. *Technometrics* **2001**, *43*, 120–132. [[CrossRef](#)]
19. Zamba, K.; Hawkins, D.M. A multivariate change-point model for statistical process control. *Technometrics* **2006**, *48*, 539–549. [[CrossRef](#)]
20. Bakir, S.T. A distribution-free Shewhart quality control chart based on signed-ranks. *Qual. Eng.* **2004**, *16*, 613–623. [[CrossRef](#)]
21. Bakir, S.T. Distribution-free quality control charts based on signed-rank-like statistics. *Commun. Stat. Theory Methods* **2006**, *35*, 743–757. [[CrossRef](#)]
22. Zhou, C.; Zou, C.; Zhang, Y.; Wang, Z. Nonparametric control chart based on change-point model. *Stat. Pap.* **2009**, *50*, 13–28. [[CrossRef](#)]
23. Qiu, P.; Zou, C.; Wang, Z. Nonparametric profile monitoring by mixed effects modeling. *Technometrics* **2010**, *52*, 265–277. [[CrossRef](#)]
24. Hawkins, D.M.; Deng, Q. A nonparametric change-point control chart. *J. Qual. Technol.* **2010**, *42*, 165–173. [[CrossRef](#)]
25. Human, S.; Chakraborti, S.; Smit, C. Nonparametric Shewhart-type sign control charts based on runs. *Commun. Stat. Theory Methods* **2010**, *39*, 2046–2062. [[CrossRef](#)]
26. Graham, M.A.; Chakraborti, S.; Human, S.W. A nonparametric exponentially weighted moving average signed-rank chart for monitoring location. *Comput. Stat. Data Anal.* **2011**, *55*, 2490–2503. [[CrossRef](#)]
27. Graham, M.A.; Chakraborti, S.; Human, S.W. A nonparametric EWMA sign chart for location based on individual measurements. *Qual. Eng.* **2011**, *23*, 227–241. [[CrossRef](#)]
28. Yang, S.F.; Cheng, S.W. A new non-parametric CUSUM mean chart. *Qual. Reliab. Eng. Int.* **2011**, *27*, 867–875. [[CrossRef](#)]
29. Yang, S.-F.; Lin, J.-S.; Cheng, S.W. A new nonparametric EWMA sign control chart. *Expert Syst. Appl.* **2011**, *38*, 6239–6243. [[CrossRef](#)]
30. Bakir, S.T. A nonparametric shewhart-type quality control chart for monitoring broad changes in a process distribution. *Int. J. Qual. Stat. Reliab.* **2012**, *2012*. [[CrossRef](#)]
31. Ghute, V.; Shirke, D. A nonparametric signed-rank control chart for bivariate process location. *Qual. Technol. Quant. Manag.* **2012**, *9*, 317–328. [[CrossRef](#)]
32. Yang, S.-F. An improved distribution free EWMA mean chart. *Commun. Stat. Simul. Comput.* **2016**, *45*, 1410–1427. [[CrossRef](#)]
33. Lu, S.L. An extended nonparametric exponentially weighted moving average sign control chart. *Qual. Reliab. Eng. Int.* **2015**, *31*, 3–13. [[CrossRef](#)]
34. Mukherjee, A.; Sen, R. Comparisons of Shewhart-type rank based control charts for monitoring location parameters of univariate processes. *Int. J. Prod. Res.* **2015**, *53*, 4414–4445. [[CrossRef](#)]
35. Riaz, M. A sensitive non-parametric EWMA control chart. *J. Chin. Inst. Eng.* **2015**, *38*, 208–219. [[CrossRef](#)]

36. Chakraborty, N.; Chakraborti, S.; Human, S.W.; Balakrishnan, N. A generally weighted moving average signed-rank control chart. *Qual. Reliab. Eng. Int.* **2016**, *32*, 2835–2845. [[CrossRef](#)]
37. Haq, A.; Khoo, M.B. A new synthetic control chart for monitoring process mean using auxiliary information. *J. Stat. Comput. Simul.* **2016**, *86*, 3068–3092. [[CrossRef](#)]
38. Abid, M.; Nazir, H.Z.; Riaz, M.; Lin, Z. An efficient nonparametric EWMA Wilcoxon signed-rank chart for monitoring location. *Qual. Reliab. Eng. Int.* **2017**, *33*, 669–685. [[CrossRef](#)]
39. Petcharat, K. Sensitive non-parametric control charts for monitoring process variation. *Int. J. Sci. Technol. Res.* **2017**, *6*, 23–25.
40. Lu, S.-L. Non parametric double generally weighted moving average sign charts based on process proportion. *Commun. Stat. Theory Methods* **2018**, *47*, 2684–2700. [[CrossRef](#)]
41. Haq, A.; Khoo, M.B. A new double sampling control chart for monitoring process mean using auxiliary information. *J. Stat. Comput. Simul.* **2018**, *88*, 869–899. [[CrossRef](#)]
42. Yang, S.-F.; Arnold, B.C. A simple approach for monitoring process mean and variance simultaneously. In *Frontiers in Statistical Quality Control 11*; Springer: Berlin, Germany, 2015; pp. 135–149.
43. Yang, S.F.; Cheng, T.C.; Hung, Y.C.; W. Cheng, S. A new chart for monitoring service process mean. *Qual. Reliab. Eng. Int.* **2012**, *28*, 377–386. [[CrossRef](#)]
44. Lowry, C.A.; Champ, C.W.; Woodall, W.H. The performance of control charts for monitoring process variation. *Commun. Stat. Simul. Comput.* **1995**, *24*, 409–437. [[CrossRef](#)]
45. Haq, A. A new hybrid exponentially weighted moving average control chart for monitoring process mean. *Qual. Reliab. Eng. Int.* **2013**, *29*, 1015–1025. [[CrossRef](#)]
46. Haq, A. A new hybrid exponentially weighted moving average control chart for monitoring process mean: Discussion. *Qual. Reliab. Eng. Int.* **2017**, *33*, 1629–1631. [[CrossRef](#)]
47. Noor-ul-Amin, M.; Khan, S.; Sanaullah, A. HEWMA control chart using auxiliary information. *Iran. J. Sci. Technol. Trans. A Sci.* **2018**, 1–13. [[CrossRef](#)]
48. Aslam, M.; Khan, N.; Aldosari, M.S.; Jun, C.-H. Mixed control charts using EWMA statistics. *IEEE Access* **2016**, *4*, 8286–8293. [[CrossRef](#)]
49. Haq, A. A new nonparametric EWMA control chart for monitoring process variability. *Qual. Reliab. Eng. Int.* **2017**, *33*, 1499–1512. [[CrossRef](#)]
50. Riaz, M.; Abbasi, S.A. Nonparametric double EWMA control chart for process monitoring. *Revist. Colomb. Estad.* **2016**, *39*, 167–184. [[CrossRef](#)]
51. Aslam, M.; Azam, M.; Jun, C.-H. A HEWMA-CUSUM control chart for the Weibull distribution. *Commun. Stat. Theory Methods* **2018**, *47*, 5973–5985. [[CrossRef](#)]
52. Aslam, M.; Khan, N.; Jun, C.-H. A hybrid exponentially weighted moving average chart for COM-Poisson distribution. *Trans. Inst. Meas. Control* **2018**, *40*, 456–461. [[CrossRef](#)]

