

Polypropylene Nanocomposite Filled with Spinel Ferrite NiFe_2O_4 Nanoparticles and In-Situ Thermally-Reduced Graphene Oxide for Electromagnetic Interference Shielding Application

Raghvendra Singh Yadav ^{1,*}, Ivo Kuřitka ¹, Jarmila Vilčáková ¹, Michal Machovský ¹, David Škoda ¹, Pavel Urbánek ¹, Milan Masar ¹, Marek Gořalik ², Michal Urbánek ¹, Lukáš Kalina ³, and Jaromir Havlica ³

¹ Centre of Polymer Systems, University Institute, Tomas Bata University in Zlín, Trida Tomase Bati 5678, 760 01 Zlín, Czech Republic; kuritka@utb.cz (I.K.); vilcakova@utb.cz (J.V.); machovsky@utb.cz (Michal Machovsky); dskoda@utb.cz (D.S.); urbanek@utb.cz (P.U.); masar@utb.cz (Milan Masař); murbanek@utb.cz (M.U.)

² Faculty of Technology, Tomas Bata University in Zlín, Vavrečkova 275, 760 01 Zlín, Czech Republic; goralik@utb.cz

³ Materials Research Centre, Brno University of Technology, Purkyňova 464/118, 61200 Brno, Czech Republic; kalina@fch.vut.cz (L.K.); havlica@fch.vut.cz (J.H.)

* Correspondence: yadav@utb.cz; Tel: +420-576031725

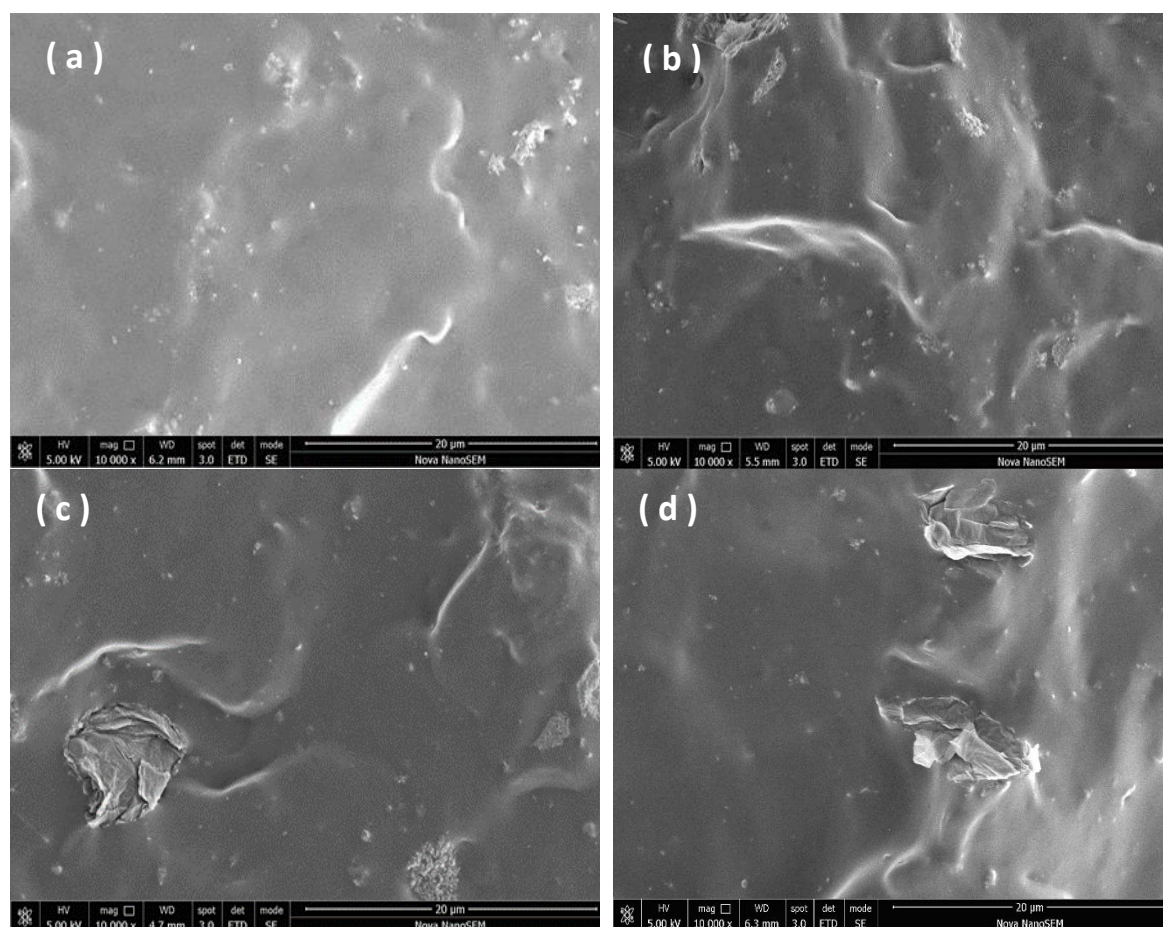


Figure S1. SEM images of cross-section of (a) NiFe_2O_4 -Polypropylene (b) NiFe_2O_4 -1wt%RGO-Polypropylene, (c) NiFe_2O_4 -3wt%RGO-Polypropylene, (d) NiFe_2O_4 -5wt%RGO-Polypropylene.