



Supplementary material

Fabrication, Characterization, and Properties of Poly (Ethylene-Co-Vinyl Acetate) Composite Thin Films Doped with Piezoelectric Nanofillers

Giulia Mariotti and Lorenzo Vannozzi *

The BioRobotics Institute, Scuola Superiore Sant'Anna, Pontedera (PI) 56025, Italy

* Correspondence: lorenzo.vannozzi@santannapisa.it; Tel.: +39-050-883091

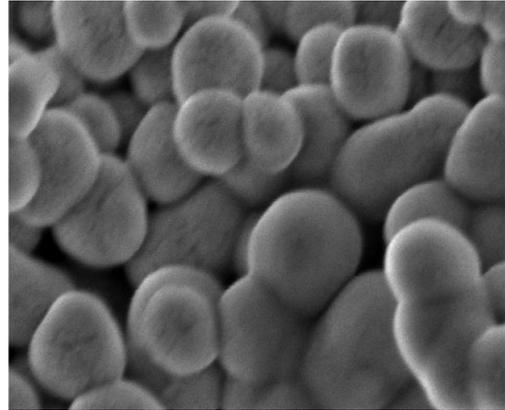
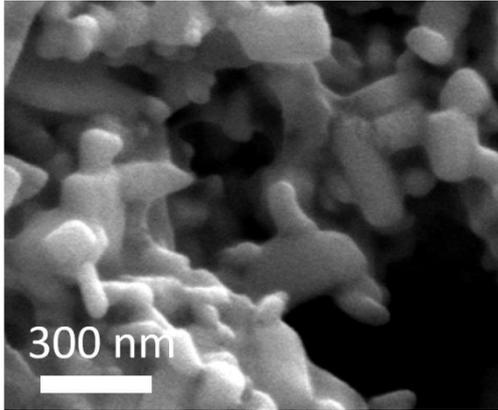


Figure S1. Dual Beam imaging of zinc oxide nanopowder (left) and barium titanate nanoparticles (right).

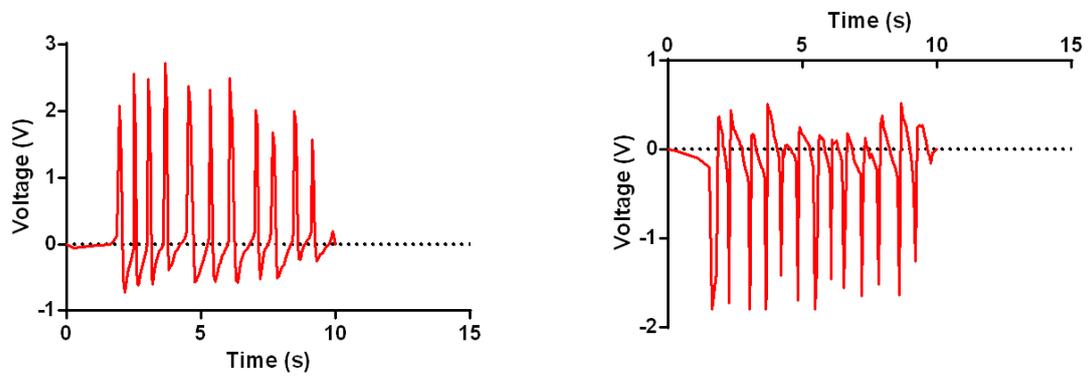


Figure S2. Voltage output in standard (left) and inverted (right) poles configuration.