

Verification of the Detection Performance of Drone Radio Telemetry for Tracking the Movement of Frogs

Hideyuki Niwa *  and Yuya Sawai

Faculty of Bioenvironmental Science, Kyoto University of Advanced Science, 1-1 Sogabe-cho Nanjyo Otani, Kyoto 621-8555, Japan; 2020AM03@kuas.ac.jp

* Correspondence: niwa.hideyuki@kuas.ac.jp; Tel.: +81-0771-29-3518

Abstract: Elucidating the various behavioral and ecological uses of animal habitats is the basis for the conservation and management of animal species. Therefore, tracking the movement of animals is necessary. Biotelemetry is used for tracking the movement of animals. By mounting a radio telemetry receiver and antenna on a drone, the time and labor required for surveying animals can be reduced. In addition, it is easy to track difficult-to-reach areas such as rice paddies and forests, and the environment is not invaded by the survey. We think that this drone radio telemetry will be the best method for tracking the movement of small amphibians, such as frogs. However, in order to put the method to practical use, the accuracy of the system needs to be verified. Approximately 26 ha of area in Sogabe, Kameoka City, Kyoto Prefecture, Japan was investigated in this study. We selected and validated the location where frogs are likely to enter farmlands. The location where the detection of movement is expected to be stable are 5 cm deep areas in the soil, gaps in masonry, and under plastic bags, whereas areas in which the detection is likely to be unstable are areas deeper than 5 cm in the soil, covered concrete channels, and grass. By calculating the geographic center, the location of the nanotag could be estimated with an accuracy of less than 16 m. We successfully showed that the drone radio telemetry system used in this study is capable of detecting and tracking the movement of animals with high spatial and temporal resolutions. However, we suggest that the detection of movement may be interrupted depending on the location of the target animal and more than three detections are needed to guarantee the accuracy of the estimation.

Keywords: drone radio telemetry; frogs; rice paddies; tracking

Citation: Niwa, H.; Sawai, Y. Verification of the Detection Performance of Drone Radio Telemetry for Tracking the Movement of Frogs. *Drones* **2021**, *5*, 139. <https://doi.org/10.3390/drones5040139>

Academic Editor: Pablo Rodríguez-González

Received: 16 October 2021

Accepted: 20 November 2021

Published: 23 November 2021

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2021 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Elucidating behavioral areas, feeding sites and times, migratory routes, dispersal behavior, habitat use, and preferences of animals is fundamental to their conservation and management. Integrating large amounts of tracking data can also help to scientifically select Areas of Ecological Significance (AESs) [1,2]. To elucidate these factors, it is necessary to track the movements of animals. However, only a limited number of species have been studied, mainly due to the limitations of available survey techniques. Therefore, developing new methods and technologies to survey species that have been difficult to track will provide new possibilities for animal conservation and management [3].

Telemetry is commonly used for animal tracking. In telemetry, a transmitter or a receiver is attached to the body of an animal. The movement of the animal is tracked based on the radio wave information transmitted and received from satellites or antennas on the ground. The telemetry used for animal tracking can be broadly classified into global navigation satellite system (GNSS) telemetry, radio telemetry, and microchip telemetry. In GNSS telemetry, a GNSS receiver attached to the animal receives radio signals from satellites and automatically records the movement of the animal. GNSS telemetry is mainly used for tracking large animals [1,4] because it is challenging to attach receivers to small animals, such as frogs. Nonetheless, receivers are becoming smaller and lighter, enabling

their usage in small animals. In microchip telemetry, an electronic labeling device is implanted in an animal and detected by a scanner that transmits radio waves. An electronic labeling device is small and lightweight and can be attached to small animals. It has previously been used to study frogs and small salamanders [5]. However, scanners work only within a close range, requiring a great deal of time and effort to traverse, and are not suitable for tracking over wide areas.

In radio telemetry, a very short wave (VHF) transmitter is attached to an animal, and a portable or fixed antenna is used to track and locate it by detecting radio waves from the transmitter. The transmitter is less expensive than a GNSS receiver and compact and lightweight transmitters are being commercialized. Transmitters have been used to survey fishes [6–8], turtles [9], and rodents [10], and it is becoming possible to attach them to small amphibians, such as frogs, if the individual size is selected. However, the range of radio waves is limited, and some terrains block these radio waves, making the process of tracking time-consuming and labor-intensive. These features made it difficult to track animals that moved over large areas.

Nonetheless, if the antenna for radio telemetry is mounted on a drone (unoccupied aerial vehicle; UAV), it will not only reduce the time and labor required for surveying but also make it easier to track difficult-to-reach areas, such as rice paddies and forests, without invading the environment through surveying. This drone radio telemetry is currently the best method for tracking the movement of small amphibians, such as frogs. Drone radio telemetry has been under development since around 2010 [11] and remained in the theoretical and simulation stages around 2015 [12]. However, Yamamoto et al. [13] used a combination of drones and handheld antennas to locate the overwintering location of *Pacifastacus leniusculus* equipped with radio transmitters. However, the use of drone radio telemetry has been limited to searching for the current location of a specific animal within a few days to a few months, and the drone radio telemetry to detect and track the movement of animals with high spatial and temporal resolutions has not been established. Although drone radio telemetry has an excellent potential to facilitate animal tracking, the use of the acquired data is limited if the accuracy cannot be estimated [14,15]. Therefore, it is necessary to establish drone radio telemetry as a system that can track the movement of small amphibians, such as frogs, through accuracy verification and technical improvements.

We herein validated the detection performance of drone radio telemetry to detect and track the movement of small amphibians, such as frogs, with high spatial and temporal resolutions.

2. Materials and Methods

2.1. Study Area

The study area was approximately 26 ha in Sogabe, Kameoka City, Kyoto Prefecture, Japan (Figure 1). Small-scale, irregularly shaped rice paddies have been preserved in the study area. In addition, stone masonry, earthen canals, and dug-up canals are present. In Kameoka City, the national Kameoka Central Agricultural Land Improvement Project is underway, and the surveyed area is included in the Sogabe construction area where construction began in 2018. The surveyed area is adjacent to the farmland before and after the field improvement.

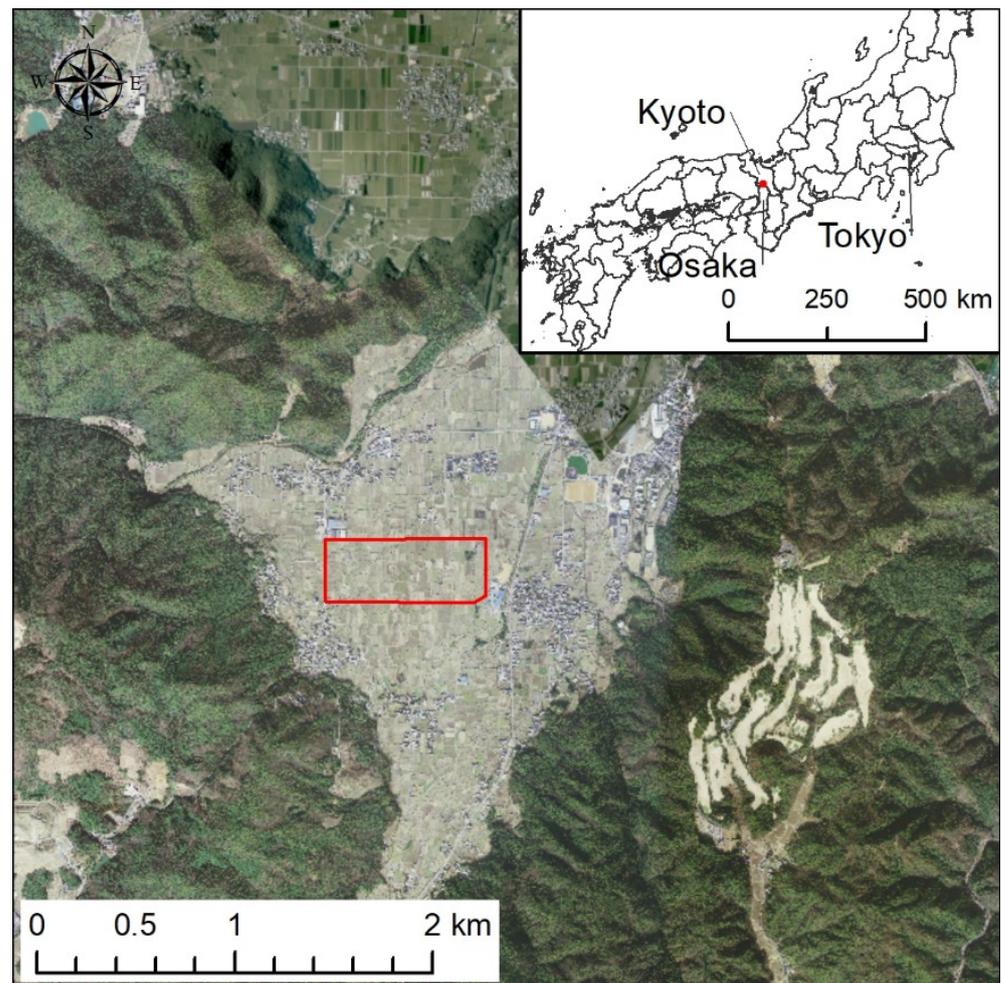


Figure 1. Location of the study area. This map is based on the GSI Tiles published by Geospatial Information Authority of Japan.

2.2. Drone Radio Telemetry System

The radio transmitter used in this study was a LOTEK NTQB2-3-2 (hereafter referred to as a “nanotag”) for terrestrial animals. If the weight of the radio transmitter attached to the animal is within 5% of the weight of the animal, it was assumed it would have little effect on behavior [15]. Therefore, this nanotag (weight 0.62 g) can be used for frogs weighing 12.4 g or more. The radio transmitter was licensed by the Ministry of Internal Affairs and Communications.

We used a drone (DJI Phantom Pro 4, Tokyo, Japan) equipped with a radio receiver and an antenna that can receive radio waves from nanotags developed by Tanaka Sanjiro Shoten Co. (Figure 2). The detection of radio waves may be confirmed by this system in real-time by emitting LEDs. The position of the animal, the strength of the radio wave, and the ID of the nanotag were recorded after radio wave detection.

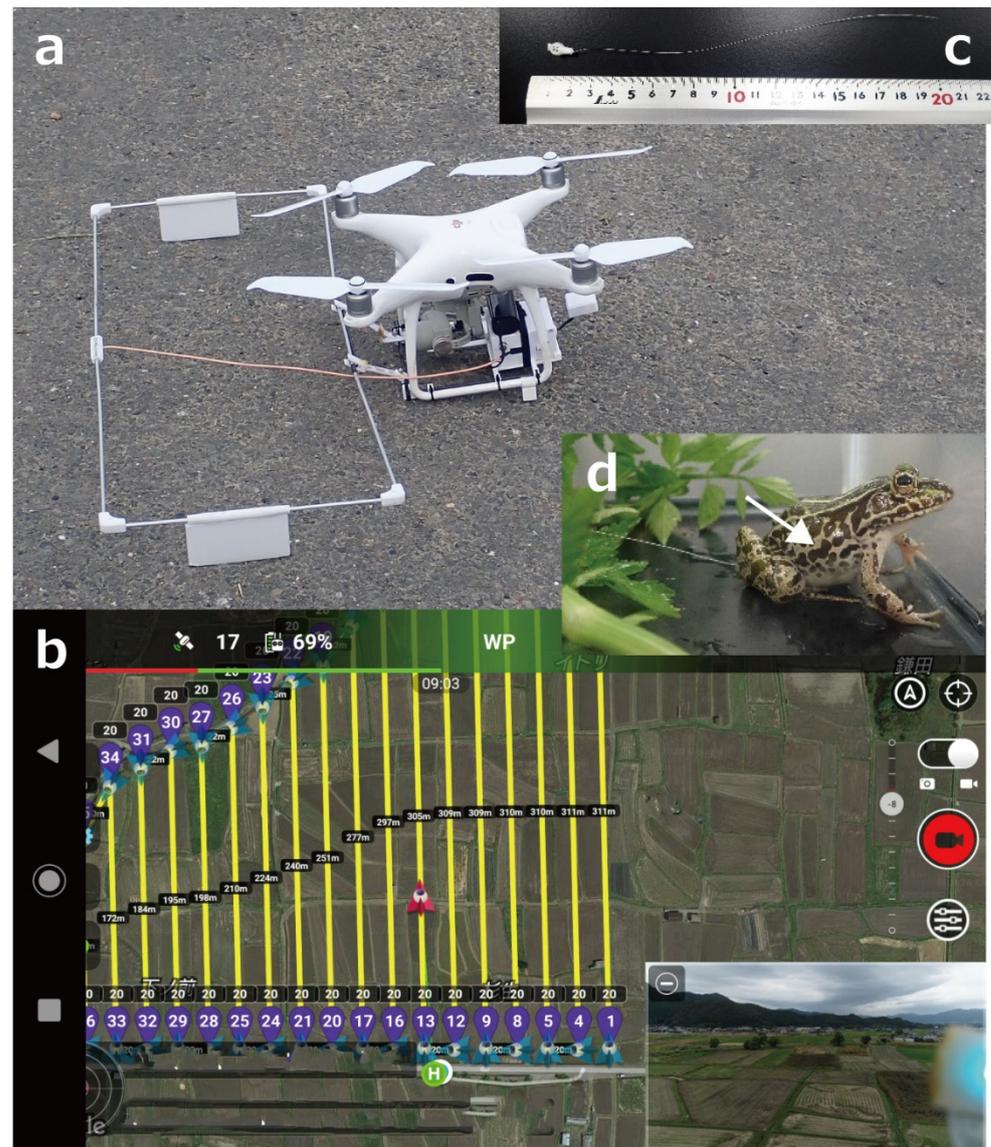


Figure 2. Drone-Radiotelemetry System for detecting and tracking the movement of small amphibians, such as frogs. (a) Receiver and antenna mounted on the Phantom 4 pro. (b) Automatic navigation by the Litchi application and LED lights are captured by the camera to confirm radio waves received during flight. (c) Radio transmitters (Nanotag). (d) Frog with nanotag inserted.

2.3. Comparison of Detection Performance by Location

Two nanotags with different IDs were placed at two different locations (Figure 3), and the drone was flown five times in the same settings. The standard flight altitude of the drone was 30 m, and the course interval was also 30 m. The radio transmission interval of the nanotag was set to 5 s. Therefore, the drone flew at 21.6 km/h, covering 30 m in 5 s. The distance between the radio wave detected points and the nanotag location was calculated in a geographic information system (GIS) and we calculated the basic statistics of those distances. We calculated the geographic center of all detected points and the distance between the geographic center and the nanotag location.



Figure 3. Location of radio transmitters (Nanotags).

2.4. Comparison of Detection Performance by Multiple Flights

The drone was set to fly at an altitude of 30 m and a course interval of 30 m. Since the radio transmission interval of the nanotag was set to 5 s, the drone flew at 21.6 km/h, covering 30 m in 5 s. The nanotags were placed directly below and in the middle of the flight path. The survey date was 8 March 2021. The distance between the radio wave detected points and the nanotag location was calculated. The basic statistics of those distances were calculated. We calculated the distance between the geographic center and the nanotag location. We combined the two validation results to show the relationship among the distance between the geographic center, the nanotag location, and the number of detections. We analyzed the relationship between the number of detections and the distance between the geographic center of the detected points and the nanotag.

3. Results

3.1. Comparison of Detection Performance by Tag Locations

The detection results for each location are shown in Table 1. The nanotag locations, detection points, and geographic centers are shown in Figure 4. In the soil, the number of detections was high at 5 cm, but decreased at 10 cm and above. At 30 cm, it was undetectable. No detection was made in the covered concrete channel. The number of

detections in masonry decreased as we moved deeper into it. Inside the earthen pipe, the number of detections was one. In a grassy area with a vegetation height of 1 m, the number of detections was one. The detection point was 61 m away from the nanotag location. Under a plastic bag, the number of detections was high, and the tag was detected in all directions of the nanotag location. The average distance between the detected points and the nanotag location was 32 m when the number of detections was two or more. The average distance between the geographic center and the nanotag location was 35 m for one detection and 7 m for two or more detections.

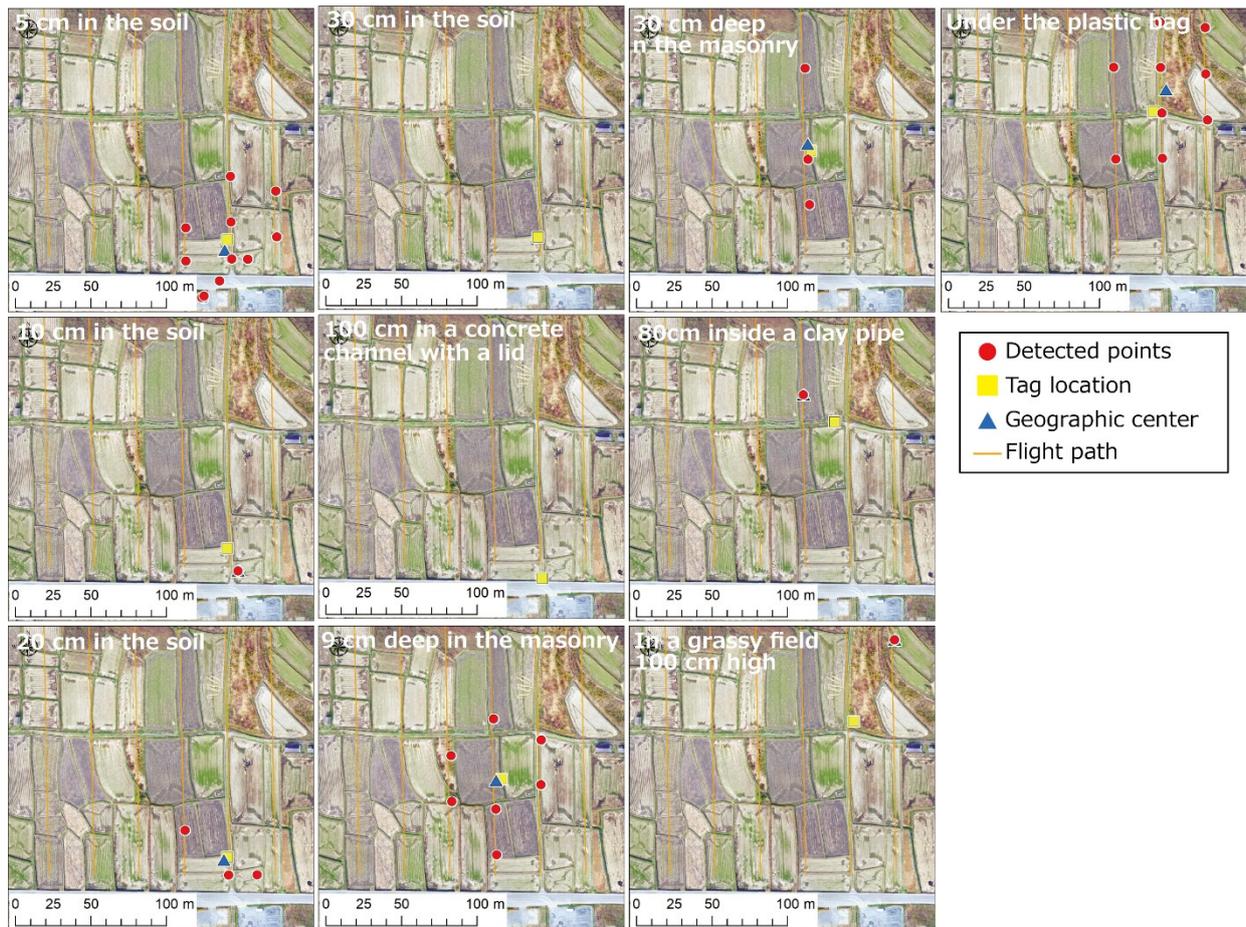


Figure 4. The nanotag locations, detected points and the geographic center of the detected points in a comparative study of detection performance by tag location.

Table 1. Comparison of detection performance by tag locations.

Flight Times	Tag Locations	Number of Detections	Distance between Detected Points and Tag				Distance between the Geographic Center of the Detected Points and the Tag
			Average Value	Maximum Value	Minimum Value	Standard Deviation	
1	5 cm in the soil	12	31	46	12	12	8
2	10 cm in the soil	1	17	17	17		17
3	20 cm in the soil	3	23	33	12	11	3
4	30 cm in the soil	0					
5	100 cm in a concrete channel with a lid	0					

Table 1. Cont.

Flight Times	Tag Locations	Number of Detections	Distance between Detected Points and Tag				Distance between the Geographic Center of the Detected Points and the Tag
			Average Value	Maximum Value	Minimum Value	Standard Deviation	
1	9 cm deep in the masonry	7	35	51	20	10	4
2	30 cm deep in the masonry	3	32	55	6	25	5
3	80 cm inside a clay pipe	1	28	28	28		28
4	In a grassy field 100 cm high	1	61	61	61		61
5	Under the plastic bag	9	39	65	5	17	16

3.2. Comparison of Detection Performance with Multiple Flights

The detection results of multiple flights are shown in Table 2, and the nanotag locations, detection points, and geographic centers are shown in Figure 5. The number of detections varied from 2 to 6, depending on the flight times. The average distance between the nanotag location and the detected points was 29 m for tag ID 162 and 30 m for tag ID 46. The mean distance between the geographic center and the nanotag location was 16 m for tag ID 162 and 12 m for tag ID 46. The difference between the aggregate values directly below the flight path (tag ID 162) and in the middle (tag ID 46) was less than 4 m.

Table 2. Comparison of detection performance by multiple flights.

Tag ID	Flight Times	Number of Detections	Distance between Detected Points and Tag				Distance between the Geographic Center of the Detected Points and the Tag
			Average Value	Maximum Value	Minimum Value	Standard Deviation	
162	1	6	34	48	16	15	22
	2	6	34	51	12	15	14
	3	2	16	18	14	2	10
	4	3	31	40	16	13	25
	5	4	29	49	6	18	12
	average value	4	29	41	13		16
46	1	4	25	42	12	12	13
	2	5	40	65	13	23	5
	3	2	21	27	14	9	10
	4	4	31	46	12	16	20
	5	6	32	47	16	13	13
	average value	4	30	45	14		12

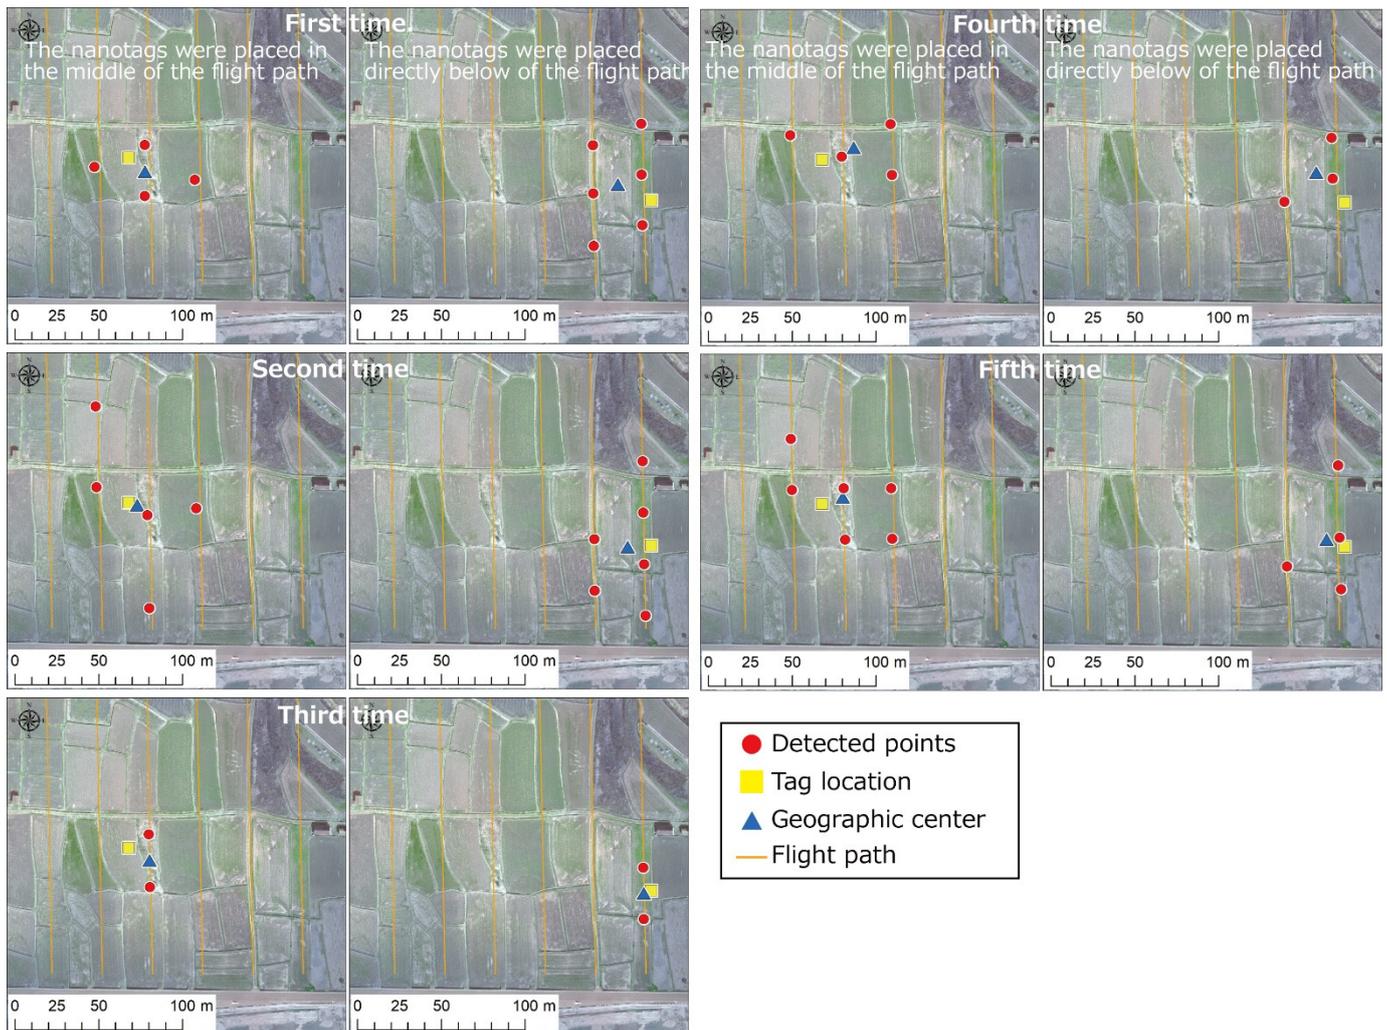


Figure 5. The nanotag locations, detected points and the geographic center of the detected points in a comparative study of detection performance by 5 flights. The nanotags were placed directly below and in the middle of the flight path.

3.3. Relationship among the Distance from the Geographic Center of the Detection Points, the Nanotag Location, and the Number of Detections

We showed the relationship among the distance between the geographic center, the nanotag location, and the number of detections in a scatter plot, fitted a logarithmic regression equation, and illustrated the 95% confidence range (Figure 6). The detection number 1 had an outlier (61 m). The distance between the geographic center and the nanotag location was long. As the number of detections increased, the distance between the geographic center and the nanotag location became shorter. The distance was less than 20 m for three or more detections.

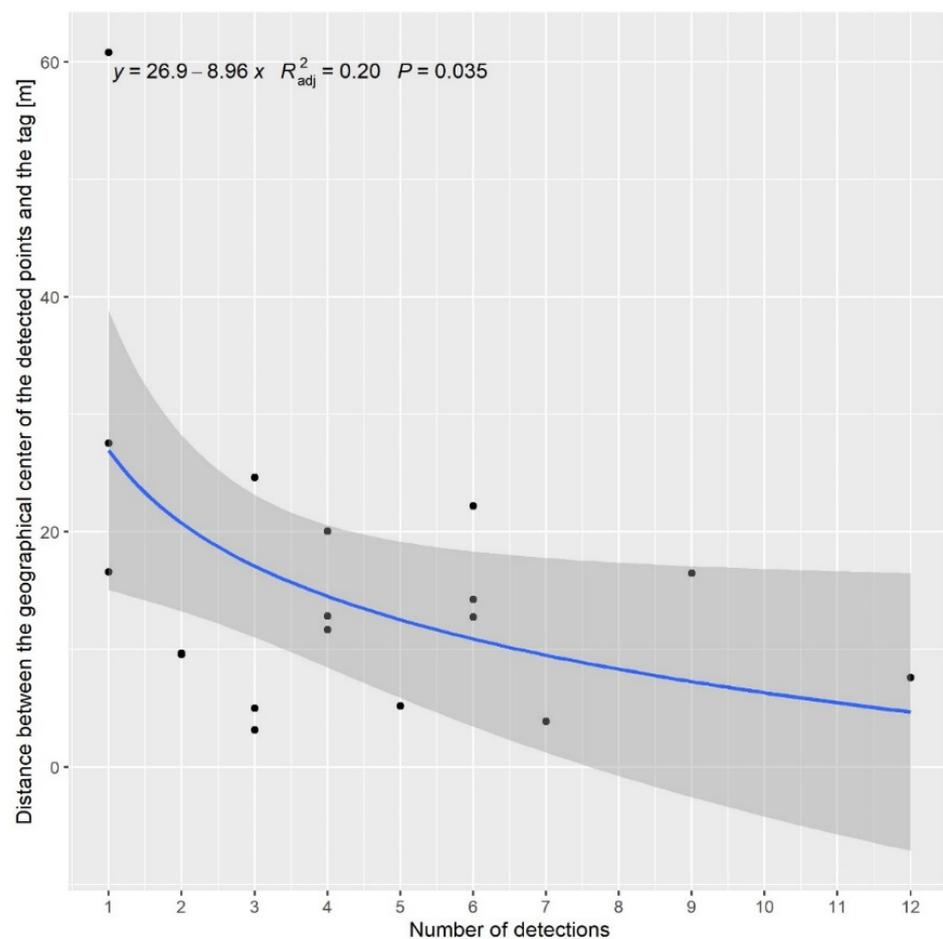


Figure 6. Relationship between the number of detections and distance between the geographic center of the detected points and the nanotag.

4. Conclusions

4.1. Nanotag Detection

We selected and validated the locations where frogs are likely to enter in paddy fields. The locations which can be detected consistently are 5 cm deep areas in the soil, gaps in masonry, under plastic bags, whereas locations where detection may not be stable are areas deeper than 5 cm in the soil, covered concrete channels, and grass. If we apply these results to the ecology of frogs living in paddy fields, we can assume that frogs cannot be detected when (1) they are hibernating deep in the soil, (2) they have been washed away in a covered concrete channel, or (3) they are in a fallow field with high vegetation. If they can be detected, their positional accuracy may decrease. Even with radiotelemetry, radio waves are reflected and attenuated by rocks and soil, making it difficult to locate them [16]. These results suggest that when detecting and tracking the movement of frogs living around paddy fields, with high spatial and temporal resolutions, detection may be interrupted depending on the location of the frogs.

4.2. Spatial Accuracy of Nanotag Detection Points

The average distance between the detected points and the nanotag location ranged from 29 m to 35 m. However, the distance between the geographic center and the nanotag location, excluding detection number one, ranged from 7 m to 16 m. Based on the calculation of the geographic center, it was found that the location of the nanotag could be estimated with an accuracy of less than 16 m. However, more than three detections are needed to guarantee the accuracy of the estimation. The location estimation accuracy of the

previous study is 22.7 ± 13.9 m [17] and 25.9 ± 25.2 m [18], and the accuracy of our system can be said to be high. If we use the drone radio telemetry system used in this study to track the frogs at a high frequency, we will be able to track the frog's movements if they move more than about 16 m.

4.3. Future Work

We successfully showed that the drone radio telemetry system used in this study is capable of detecting and tracking the movement of animals with high spatial and temporal resolutions. However, it is suggested that the detection might be interrupted, depending on the location of the target animal. In addition, although only nanotags were installed in this study, the size of the target animal may have affected the detection performance when the tags were attached to the animals. Few studies have actually used the drone radio telemetry system to track organisms [18]. In the future, it will be necessary to continue verifying in various environments and animals to further clarify the relationship between the location of the target animal and the detection performance. In addition, it is necessary to improve the reception performance by improving receivers and antennas.

Author Contributions: Conceptualization, H.N.; methodology, H.N.; software, H.N.; validation, H.N.; formal analysis, H.N.; investigation, H.N. and Y.S.; resources, H.N.; data curation, H.N. and Y.S.; writing—original draft preparation, H.N.; writing—review and editing, H.N.; visualization, H.N.; supervision, H.N.; project administration, H.N. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: Not applicable.

Conflicts of Interest: The authors declare no conflict of interest.

References

- Hindell, M.A.; Reisinger, R.R.; Ropert-Coudert, Y.; Hückstädt, L.A.; Trathan, P.N.; Bornemann, H.; Charrassin, J.-B.; Chown, S.L.; Costa, D.P.; Danis, B.; et al. Tracking of marine predators to protect Southern Ocean ecosystems. *Nature* **2020**, *580*, 87–92. [[CrossRef](#)] [[PubMed](#)]
- Ropert-Coudert, Y.; Van de Putte, A.P.; Reisinger, R.R.; Bornemann, H.; Charrassin, J.-B.; Costa, D.P.; Danis, B.; Hückstädt, L.A.; Jonsen, I.D.; Lea, M.-A.; et al. The retrospective analysis of Antarctic tracking data project. *Sci. Data* **2020**, *7*, 94. [[CrossRef](#)] [[PubMed](#)]
- Black, S.A. Assessing Presence, Decline, and Extinction for the Conservation of Difficult-to-Observe Species BT. In *Problematic Wildlife II: New Conservation and Management Challenges in the Human-Wildlife Interactions*; Angelici, F.M., Rossi, L., Eds.; Springer International Publishing: Cham, Switzerland, 2020; pp. 359–392. ISBN 978-3-030-42335-3.
- Shafer, M.W.; Vega, G.; Rothfus, K.; Flikkema, P. UAV wildlife radiotelemetry: System and methods of localization. *Methods Ecol. Evol.* **2019**, *10*, 1783–1795. [[CrossRef](#)]
- Ueno, Y.; Sonoda, Y.; Matsue, M.; Kurihara, M. Monitoring techniques of small salamander using microtip. *Ecol. Civ. Eng.* **2015**, *17*, 101–104. [[CrossRef](#)]
- Aruga, M.; Tsuda, Y.; Fujioka, K.; Honda, K.; Mitsunaga, Y.; Mihara, K.; Miyashita, K. Upriver migration of chum salmon, *Oncorhynchus keta*, in the Ishikari River. *Ecol. Civ. Eng.* **2009**, *12*, 119–130. [[CrossRef](#)]
- Nii, H.; Makiguchi, Y.; Fujii, M. Upriver spawning migration of shishamo smelt *Spirinchus lanceolatus* assessed by radio telemetry. *Fish. Sci.* **2010**, *76*, 855–869.
- Mori, A.; Mizutani, M.; Goto, A. Monitoring of activity of catfish *Silurus asotus* with acoustic telemetry in a small stream. *Ecol. Civ. Eng.* **2013**, *16*, 23–35. [[CrossRef](#)]
- Hara, Y.; Ohsugi, T.; Yokoo, K.; Oda, Y.; Fukui, D.; Takenaka, T.; Arimoto, S. Relationship between home range of the Japanese Pond Turtle, *Mauremys japonica*, and agro-ecosystem in rural landscape of Kainan City, Wakayama Prefecture, central Japan. *Nanki Seibutsu* **2015**, *57*, 97–106.
- Oishi, K.; Arakaki, T.; Nakamura, M.; Hata, K.; Sone, K. Spatial arrangement and size of home ranges of *Apodemus speciosus* inhabiting evergreen broad-leaved forest and adjacent cedar plantation, and migration between these stands. *Honyurui Kagaku Mamm. Sci.* **2018**, *58*, 23–31. [[CrossRef](#)]

11. Körner, F.; Speck, R.; Göktogan, A.H.; Sukkarieh, S. Autonomous airborne wildlife tracking using radio signal strength. In Proceedings of the 2010 IEEE/RSJ International Conference on Intelligent Robots and Systems, Taipei, Taiwan, 18–22 October 2010; pp. 107–112.
12. Chabot, D.; Bird, D.M. Wildlife research and management methods in the 21st century: Where do unmanned aircraft fit in? *J. Unmanned Veh. Syst. Virtual Issue* **2015**, *3*, 137–155. [[CrossRef](#)]
13. Yamamoto, A.; Kanno, T.; Machida, Y.; Nakatsuka, S.; Suzuki, M.; Tanaka, T.; Kanaiwa, M. The drone telemetry to identify the habitat of female signal crayfish bore eggs introduced in a small river on eastern Hokkaido over winter. *Ecol. Civ. Eng.* **2020**, *22*, 125–131. [[CrossRef](#)]
14. Desrochers, A.; Tremblay, J.A.; Aubry, Y.; Chabot, D.; Pace, P.; Bird, D.M. Estimating Wildlife Tag Location Errors from a VHF Receiver Mounted on a Drone. *Drones* **2018**, *2*, 44. [[CrossRef](#)]
15. Saeki, M.; Waseda, K. Radio-tracking and data analysis. *Honyurui Kagaku Mamm. Sci.* **2006**, *46*, 193–210. [[CrossRef](#)]
16. Madison, D.M.; Titus, V.R.; Lamoureux, V.S. Movement patterns and radiotelemetry. In *Amphibian Ecology and Conservation: A Handbook of Techniques*; Oxford Biology; Dodd, C.K., Ed.; OUP Oxford: Oxford, UK, 2010; ISBN 9780199541188.
17. Nguyen, H.V.; Chesser, M.; Koh, L.P.; Rezaatofghi, S.H.; Ranasinghe, D.C. TrackerBots: Autonomous unmanned aerial vehicle for real-time localization and tracking of multiple radio-tagged animals. *J. Field Robot.* **2019**, *36*, 617–635. [[CrossRef](#)]
18. Hui, N.T.; Lo, E.K.; Moss, J.B.; Gerber, G.P.; Welch, M.E.; Kastner, R.; Schurgers, C. A more precise way to localize animals using drones. *J. Field Robot.* **2021**, *38*, 917–928. [[CrossRef](#)]