

Accuracy of Photo-Optical Measurement of Wood Piles [†]

Tobias Cremer ^{1,*}, Ferreol Berendt ¹, Felipe de Miguel Diez ¹, Felix Wolfgramm ¹ and Lubomir Blasko ²

¹ Department of Forest Utilization and Timber Markets, Eberswalde University for Sustainable Development, 16225 Eberswalde, Germany; ferreol.berendt@hnee.de (F.B.); felipe.diez@hnee.de (F.d.M.D.); felixwolfgramm@yahoo.de (F.W.)

² Landeswaldoberförsterei Chorin, Amt Chorin 11, 16230 Chorin, Germany; lubomir.blasko@lfb.brandenburg.de

* Correspondence: tobias.cremer@hnee.de

[†] Presented at the 1st International Electronic Conference on Forests—Forests for a Better Future: Sustainability, Innovation, Interdisciplinarity, 15–30 November 2020; Available online: <https://iecf2020.sciforum.net/>.

Abstract: The accurate estimation of timber volume is of the utmost importance. For industrial timber, the volume is often estimated as stacked cubic meters. In addition to manual measurements, volume estimation is possible with photo-optical systems. Over 100 piles of industrial timber of broadleaved tree species were analyzed. In the study, a standard manual measurement method for the estimation of wood pile volumes was compared with a smartphone based photo-optical application for the determination of woodpile volume. Mean gross volume of the piles was approximately 56 m³ and mean width of piles was 9.43 m. A strong correlation was found between the manual measurements and the photo-optical measurement. However, volume estimation of large volume piles seems to perform better in comparison to piles with small volumes. Further research is needed to determine the effects of variables such as log quality or quality of pile on volume estimation accuracy.

Keywords: timber stack; volume estimation; logistic; timber trade

Citation: Cremer, T.; Berendt, F.; de Miguel Diez, F.; Wolfgramm, F.; Blasko, L. Accuracy of Photo-Optical Measurement of Wood Piles. *Environ. Sci. Proc.* **2021**, *3*, 90. <https://doi.org/10.3390/IECF2020-08192>

Academic Editors: Angela Lo Monaco, Cate Macinnis-Ng and Om P. Rajora

Published: 14 November 2020

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2020 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).

1. Introduction

The correct measurement of harvested wood is seen as one of the most economically important tasks in the wood supply chain. In Germany, several measurement methods are described in detail in the German framework agreement for timber trade (RVR) [1]. Similar instructions for timber measurement are available—for example, in Sweden [2] or in Canada [3]. The timber volumes estimated with one of the methods described in the RVR are seen as the legal trade volumes. In addition to timber volume estimation methods for roundwood and woodpiles, the RVR also describes how to grade timber by means of quality. For the estimation of woodpile volumes, the RVR favors manual measurements. However, in the course of the fast digitalization process in forestry, several applications (apps) for mobile devices are now being used by large forest companies to facilitate measurement of woodpiles using photo-optical approaches. These measurements are mostly used as control measures for internal documentation. Up to now, only one system has been calibrated and therefore enables legally secure sales processes: the system sScaleTM performs the measurement with a stereo camera technology which is mounted on a car [4]. Other measurement systems use photos taken by the user with a smartphone application (app) [5,6]. However, detailed analysis of the accuracy of these app measurements is not yet available.

Thus, the research goal was to evaluate the accuracy of one widespread app compared to the manual measurement method for the determination of woodpile volumes described in the RVR.

2. Material and Methods

For the analysis, 109 piles of different broadleaved tree species were measured. The tree species were mostly European beech (*Fagus sylvatica*, L.), European ash (*Fraxinus excelsior*, L.) or a mix of both tree species. All measurements were performed by a professional forestry worker in Northeastern Germany between October 2019 and April 2020.

The volume of each pile was derived manually using the manual measurement method as described in the RVR [1]. Here, the pile was divided into equal-length sections (plus a last section, which is generally shorter) and the height was measured in the middle of each section (Figure 1).

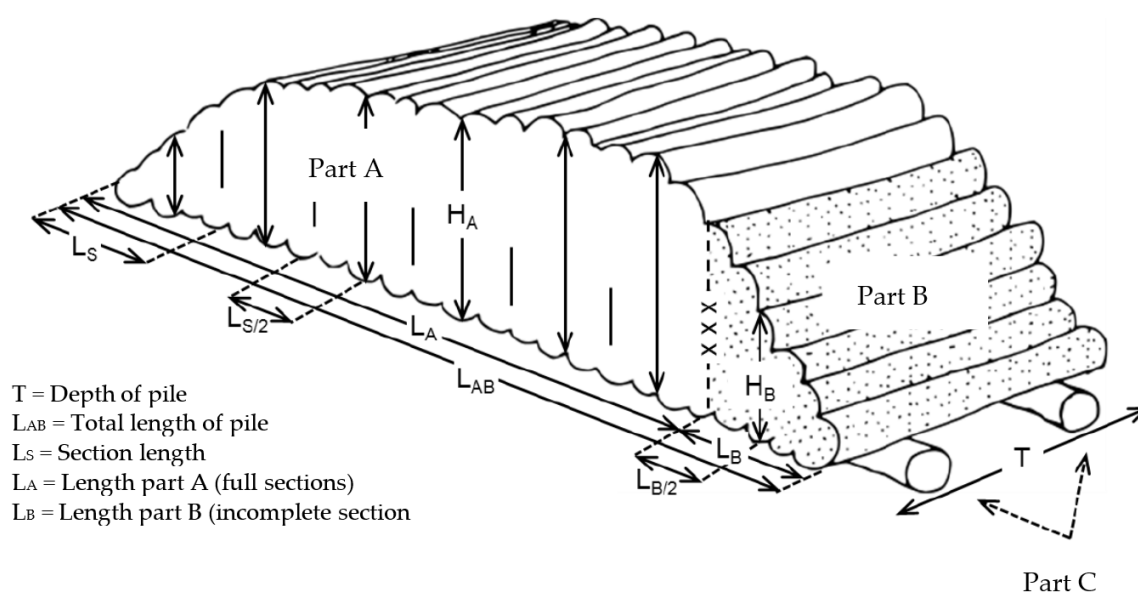


Figure 1. Manual measurement of wood piles according to German framework agreement for timber trade (RVR) method [1].

Using the mean height, the total length of the pile and the length of the assortment, the volume of the pile could be estimated. This method was applied twice for each stack: once when dividing the pile into sections from the left side (RVR_{left}) and once when dividing from the right side (RVR_{right}) of the pile.

Volume estimation with the app was carried out with the widespread app iFOVEA. As a reference, the total length of the pile has to be measured to the exact centimeter. Moreover, the contour of the pile must be delineated manually after the stitching process of the photos. According to the manufacturer, the app was developed for piles with heights between 1.5 and 4.5 m and widths between 4 and 40 m [6].

Requirements for both RVR and iFOVEA are that the front of the pile should be accessible, that it does not contain foreign matter (e.g., branches, slashes, snow...) and that the logs on the front side are levelled out, amongst others [1,6].

For the analysis, the piles were grouped into eight volume categories: from 0 to 10 m³, >10 to 20 m³, >20 to 40 m³, >40 to 60 m³, >60 to 80 m³, >80 to 100 m³, >100 to 150 m³ and >150 m³. All volumes were calculated in gross stacked cubic meters without reduction factors (i.e., including bark and interstices).

3. Results

The mean gross volumes across all piles were 56.53, 57.22 and 55.50 m³ for the measurements RVR_{left}, RVR_{right} and iFOVEA, respectively. No significant difference of the means was found when conducting a *t*-test between the approaches. The mean and

standard deviation of the widths of the piles was 9.43 ± 6.05 m. As expected, the total length of the pile increased with volume of the pile (Figure 2).

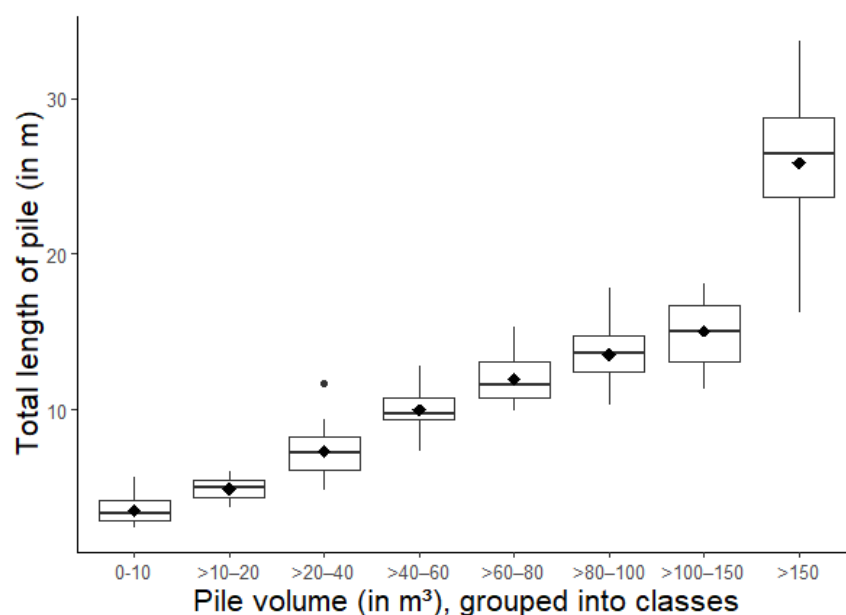


Figure 2. Total length of pile (in m) in relation to pile volume (in m³), grouped into classes.

When comparing the results obtained with the RVR method with the results obtained with the app, the slopes were near to 1 and R^2 over 0.99 (Figure 3). However, the results showed that when measuring small piles with volumes less than 20 m³, the variance between the different measurement methods was higher in comparison to measuring piles with larger volumes. The mean variance between the different pile volume estimation methods for piles <20 m³ was $\pm 4.02\%$, while for piles >100 m³ the mean variance was $\pm 1.82\%$.

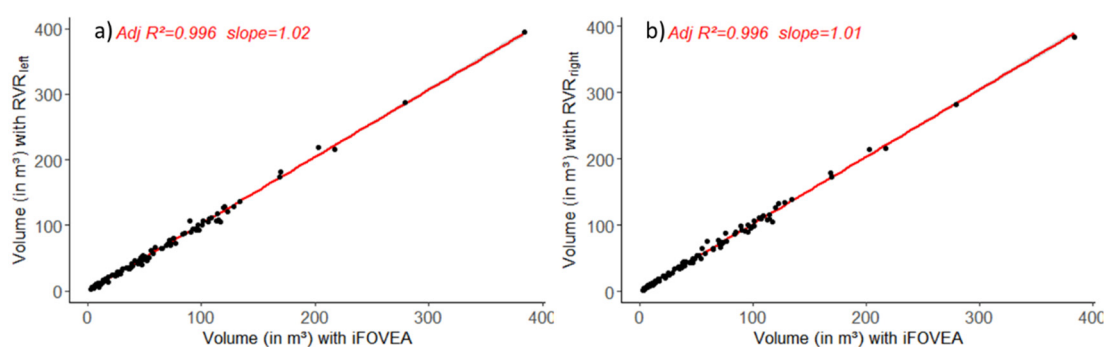


Figure 3. Volume estimation comparison between (a) RVR_{left} and iFOVEA and between (b) RVR_{right} and iFOVEA.

4. Discussion and Conclusions

The results of this study show that gross volume measurement of piles with the photo-optical app is highly congruent with the manual measurements using the RVR method. The strong correlation between the manually derived estimation of wood piles and the photo-optical measurement is in accordance with previous results [7]. Moreover, the higher variance between the measurement methods for small piles is in accordance with the requirements formulated both in the RVR and by iFOVEA, such as a minimum volume of piles of 20 m³. However, even when these requirements were fulfilled, differences in volume between methods can be found. Reasons for such differences may be found in the tree species—the quality of industrial timber from broadleaved tree species can be determined as much lower compared to industrial timber from coniferous

tree species. Especially, the proportion of crooked timber was higher which often leads to more interstices in the pile. Thus, the effect of log and pile quality on the volume measurement accuracy should be studied in more detail.

Nevertheless, based on these results, it can be said that photo-optical approaches can offer a meaningful solution for woodpile measurement. It can be an attractive alternative compared to manual measurement of woodpiles, especially when marketing large volumes of wood of good quality.

Author Contributions: Conceptualization, T.C., F.W. and L.B.; methodology, T.C., F.B. and F.W.; formal analysis, F.B.; data curation, F.W.; writing—original draft preparation, F.B.; writing—review and editing, T.C. and F.d.M.D. All authors have read and agreed to the published version of the manuscript.

Funding: This study was undertaken in the framework of the project “HoBeOpt”, which was financially supported via the Fachagentur Nachwachsende Rohstoffe (FNR), Germany, by the Federal Ministry of Food and Agriculture (BMEL) (Grant number: 22007918).

Institutional Review Board Statement: Not applicable

Informed Consent Statement: Not applicable.

Data Availability Statement: The data presented in this study are available on request from the corresponding author.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Deutscher Forstwirtschaftsrat; Deutscher Holzwirtschaftsrat. *Rahmenvereinbarung für den Rohholzhandel in Deutschland (RVR)*, 3rd ed.; Fachagentur für Nachwachsende Rohstoffe e.V. (FNR): Gülzow-Prüzen, Germany, 2020.
2. SDC ek för. *SDC's Instructions for Timber Measurement. Measurement of Roundwood Stacks*; SDC ek för: Sundsvall, Sweden, 2014.
3. Ministry of Natural Resources and Forestry. *Scaling Manual*, 4th ed.; Ministry of Natural Resources and Forestry: Peterborough, ON, Canada, 2017.
4. DRALLE A/S. Stacks. Available online: <https://de.dralle.dk/stacks> (accessed on 27 October 2020).
5. TIMBETER HQ. Pile Measurement. Available online: <https://www.timbeter.com/pile-measurement/> (accessed on 27 October 2020).
6. SDP Digitale Produkte GmbH. iFOVEA Pro. Available online: https://fovea.eu/ifovea_pro_woodpile_measurement?language=en (accessed on 27 October 2020).
7. Cremer, T.; Blasko, L. Analyse der fotooptischen Vermessung von Kiefernstamm- und industrieholz im Vergleich zum Sektionsraumaß. *Allg. Forst Jagdztg* **2017**, *188*, 127–139.